

- Hey, J. S. 1946 *Nature*, 157, 47.  
 Lovell, A. C. B. & Banwell, C. J. 1946 *Nature*, 158, 517.  
 Martyn, D. F. 1946 *Nature*, 158, 308.  
 McCready, L., Pawsey, J. L. & Payne-Scott, R. 1947 *Proc. Roy. Soc. A*, 190, 357.  
 Nyquist, H. 1928 *Phys. Rev.* 32, 110.  
 Pawsey, J. L., Payne-Scott, R. & McCready, L. 1946 *Nature*, 157, 158.  
 Sander, K. F. 1947 *Nature*, 159, 506.  
 Schottky, W. 1922 *Ann. Phys., Lpz.*, 68, 157.  
 Southworth, G. C. 1945 *J. Franklin Inst.* 239, 285.

## Natural evaporation from open water, bare soil and grass

BY H. L. PENMAN

*Physics Department, Rothamsted Experimental Station, Harpenden, Herts.*

(Communicated by B. A. Keen, F.R.S.—Received 9 October 1947)

[PLATE 3]

Two theoretical approaches to evaporation from saturated surfaces are outlined, the first being on an aerodynamic basis in which evaporation is regarded as due to turbulent transport of vapour by a process of eddy diffusion, and the second being on an energy basis in which evaporation is regarded as one of the ways of degrading incoming radiation. Neither approach is new, but a combination is suggested that eliminates the parameter measured with most difficulty—surface temperature—and provides for the first time an opportunity to make theoretical estimates of evaporation rates from standard meteorological data, estimates that can be retrospective.

Experimental work to test these theories shows that the aerodynamic approach is not adequate and an empirical expression, previously obtained in America, is a better description of evaporation from open water. The energy balance is found to be quite successful. Evaporation rates from wet bare soil and from turf with an adequate supply of water are obtained as fractions of that from open water, the fraction for turf showing a seasonal change attributed to the annual cycle of length of daylight. Finally, the experimental results are applied to data published elsewhere and it is shown that a satisfactory account can be given of open water evaporation at four widely spaced sites in America and Europe, the results for bare soil receive a reasonable check in India, and application of the results for turf shows good agreement with estimates of evaporation from catchment areas in the British Isles.

### LIST OF SYMBOLS USED

|                 |   |
|-----------------|---|
| $x, y, z$       | Co-ordinate axes downwind, acrosswind and vertical.   |
| $u_x$           | Mean horizontal wind velocity in $x$ direction measured at height $z$ ; usually in miles/day. |
| $T_s, T_a, T_d$ | Temperature of surface, air and dewpoint; usually °F.   |
| $e_s, e_a, e_d$ | Saturation vapour pressure at above temperature; usually in mm. Hg.                           |
| $h$             | Relative humidity = $e_d/e_a$ .   |
| $\Delta$        | $de_a/dT_a$ .   |
| $\phi$          | $(e_s - e_a)/(e_s - e_d)$ .   |
| $\alpha$        | Constant defining hydrolapse.   |
| $\beta$         | Bowen's ratio = $\gamma(T_s - T_a)/(e_s - e_d)$ .   |

|                 |                                      |
|-----------------|--------------------------------------|
| $\gamma$        | Constant of wet<br>$\gamma = 0.27$ . |
| $E_0, E_B, E_T$ | Evaporation rate                     |
| $E_a$           | Value of $E_0$ obtained              |
| $R_C$           | Short-wave radiation                 |
|                 | valent of mm./hr.                    |
| $R_A$           | Angot value of                       |
| $r$             | Radiation reflection                 |
|                 | possibility of coefficient           |
| $m/10$          | Fraction of sky                      |
| $n/N$           | Ratio of actual                      |
| $H$             | Net radiant energy                   |
| $K, S, C$       | Parts of $H$ used                    |
|                 | duction to surface                   |
| 5B, 16T         | Depths to water                      |
| $\lambda$       | Specific yield of                    |
| $R, D$          | Rainfall, drainage                   |
| $B$             | Beaufort wind                        |

Three kinds of surface are extended areas of land, the leaves act as transpiring surface, at, or just below, the soil takes place directly. Although e.g. in attempting to assess justification of the great advantage it presents of providing of this, it is convenient to from bare and cropped soil from open water, seeking water evaporation, and con from open water exposed to

Evaporation from bare conditions: transpiration biological features, for a considerable depth of soil considerable thickness of this transfer, in general, to from bare soil and of trans factors, but the present a early stages that would arise when soil type, crop type

517.  
7 *Proc. Roy. Soc. A*, 190, 357.  
*Nature*, 157, 158.

; bare soil and grass

Station, Harpenden, Herts.

ceived 9 October 1947)

l surfaces are outlined, the first led as due to turbulent transport ing on an energy basis in which ing radiation. Neither approach parameter measured with most ; time an opportunity to make meteorological data, estimates

e aerodynamic approach is not America, is a better description to be quite successful. Evapora- to be quite successful. Evapora- supply of water are obtained as ng a seasonal change attributed erimental results are applied to y account can be given of open nd Europe, the results for bare the results for turf shows good eas in the British Isles.

nd vertical.  
ction measured at height  $z$ ;

; usually ° F.  
erature; usually in mm. Hg.

- Constant of wet and dry bulb hygrometer equation; in ° F and mm. Hg,  $\gamma = 0.27$ .
- $E_B, E_T$  Evaporation rate from open water, bare soil and turf; usually in mm./day.
- Value of  $E_0$  obtained by putting  $e_s = e_a$  in sink strength formula.
- Short-wave radiation from sun and sky; usually in evaporation equivalent of mm./day.
- Angot value of  $R_c$  for a completely transparent atmosphere.
- Radiation reflexion coefficient. (Also used for runoff without any possibility of confusion.)
- Fraction of sky covered by cloud.
- Ratio of actual/possible hours of sunshine.
- Net radiant energy available at surface.
- Parts of  $H$  used in convective transfer to air, storage in water, conduction to surround.
- Depths to water-table (in.) and type of cover (bare, turf).
- Specific yield of soil.
- Rainfall, drainage.
- Beaufort wind force.

1. INTRODUCTION

Three kinds of surface are important in the return of rain to the atmosphere. For extended areas of land, they are, in order of importance: vegetation, on which plant leaves act as transpiring surfaces; bare or fallow soil, from which water evaporates at, or just below, the soil-air interface; and open water, from which evaporation takes place directly. Although the last may be of predominant importance locally, e.g. in attempting to assess the water balance of lakes and reservoirs, the chief justification of the great attention given to it (see § 2, below) is found in the opportunity it presents of providing a reproducible surface of known properties. Because of this, it is convenient to approach the problems of the dependence of evaporation from bare and cropped soil on weather conditions through a study of evaporation from open water, seeking an absolute relation between weather elements and open water evaporation, and comparative relations between losses from the soil and losses from open water exposed to the same weather.

Evaporation from bare soil involves complex soil factors as well as atmospheric conditions: transpiration studies add to these further important physical and biological features, for a plant's root system can draw on moisture throughout a considerable depth of soil, its aerial parts permit vapour transfer throughout a considerable thickness of air, and its photo-sensitive stomatal mechanism restricts this transfer, in general, to the hours of daylight. A complete survey of evaporation from bare soil and of transpiration from crops should take account of all relevant factors, but the present account will be largely restricted to consideration of the early stages that would arise after thorough wetting of the soil by rain or irrigation, when soil type, crop type and root range are of little importance.

## 2. THE ESTIMATION OF EVAPORATION FROM WEATHER DATA

Two requirements must be met to permit continued evaporation. There must be a supply of energy to provide the latent heat of vaporization, and there must be some mechanism for removing the vapour, i.e. there must be a sink for vapour. Analytical attacks on the problem start from one of these two points and it is convenient to consider the latter first as it has been the more popular.

## (a) Sink strength

## (i) Empirical equations

Until recent years the approach was empirical, a hundred years' work since Dalton having produced little improvement in the form of equation he gave. In essentials it is

$$E = (e_s - e_a) f(u), \quad (1)$$

where  $E$  is the evaporation in unit time,  $e_s$  is the vapour pressure at the evaporating surface,  $e_a$  is the vapour pressure in the atmosphere above, and  $f(u)$  is a function of the horizontal wind velocity. For water,  $e_s$  is known if the surface temperature is known. Of the many empirical formulae cast into this form, one due to Rohwer (1931) summarizes results of very intensive work at Fort Collins, Colorado, at 5000 ft. above sea-level. Other things being equal, Rohwer found a small variation of evaporation rates with atmospheric pressure, and reduced to conditions at sea-level, his equation for the daily rate from an open water surface 3 ft. square is

$$E = 0.40(e_s - e_a)(1 + 0.27u_0) \text{ mm./day}, \quad (2)$$

where vapour pressures are in mm. mercury, and wind speed at ground level is in m.p.h. Examining the effect of size of surface on evaporation rates, over a period of 485 days, he compared the observed values of evaporation from a large surface 86 ft. diameter with the estimates based on (2), and found the mean value of observed/estimated to be 0.77. There is some bias here, however, for the average wind speed over the whole period was only 1.50 m.p.h., and examination of the individual daily records shows that on the rare occasions of a wind speed in excess of 3 m.p.h. the correction factor is nearly unity. The ground wind velocity,  $u_0$ , is an extrapolated value estimated from a number of readings at various heights, and if from Rohwer's  $u, z$  curve we interpolate at 2 m., the relation becomes

$$E = 0.40(e_s - e_a)(1 + 0.17u_2) \text{ mm./day}, \quad (3)$$

and except at very low wind speeds might be expected to apply to large open water surfaces.

## (ii) Aerodynamic equations

As an alternative to this empirical treatment an aerodynamical approach has been made in recent years. A simple treatment (Penman 1940) showed that the right order of magnitude could be obtained by assuming that the main resistance to the evaporation current is provided by a thin layer of air (c. 1 to 3 mm. thick) next to the

surface, in which air movement across which is by a process having wider implications than considered the turbulent mixing boundary layer, and it attempts rates per unit area upon size elements. An account of this the work of O. G. Sutton (1943) and Pasquill (1943) has a rectangular strip of length  $a$

$$E(x)$$

where  $C$  is a constant related of the air at a height great  $e$  the wind velocity at  $z = 2$  m use the same general theory  $(e_s - e_a) = \alpha(e_s - e'_a)$  where  $e'_a$  is almost independent of  $u$   $x_0$  is obtained, and, substituting gradient, it becomes  $E =$

In the open it is impossible putting  $x_0 = 1.6 \times 10^6$  cm. (1)

$$E :$$

where  $e_s$  and  $e_a$  are in mm. n miles/day—a practical conv-

$$E$$

Notes. (1) The assumption:  $e_s$  and  $e_a$ , where  $e_a$  is the sa:  $e_s - e_a$  then becomes  $e_a(1 - h$

(2) A tenfold increase in and the constant in (6a) wil

Certain simplifying assumptions, reliable estimates of the amount required to evaporate, possible to build up the following the incoming short-wave radiation between earth and sky (Br

$$H = R_C(1 -$$

OM WEATHER DATA

ued evaporation. There must  
porization, and there must be  
e must be a sink for vapour.  
these two points and it is con-  
more popular.

undred years' work since Dalton  
quation he gave. In essentials

(1)

ir pressure at the evaporating  
bove, and  $f(u)$  is a function of  
if the surface temperature is  
his form, one due to Rohwer  
t Fort Collins, Colorado, at  
hwer found a small variation  
reduced to conditions at sea-  
ter surface 3 ft. square is

(2)

1./day,  
nd speed at ground level is in  
poration rates, over a period  
poration from a large surface  
nd the mean value of observed/  
r, for the average wind speed  
nation of the individual daily  
eed in excess of 3 m.p.h. the  
locity,  $u_0$ , is an extrapolated  
heights, and if from Rohwer's

(3)

1./day,  
to apply to large open water  
erodynamical approach has  
1940) showed that the right  
at the main resistance to the  
1 to 3 mm. thick) next to the

surface, in which air movement is essentially non-turbulent, and vapour movement  
cross which is by a process of molecular diffusion. The more formal treatment,  
giving wider implications than the solution of evaporation problems, has con-  
sidered the turbulent mixing and transport of the vapour outside this sublamina  
boundary layer, and it attempts to take into account the dependence of evaporation  
rates per unit area upon size and shape of the test area as well as upon weather  
elements. An account of this work is given by Brunt (1939) up to and including  
the work of O. G. Sutton (1934). Extension of Sutton's work by W. G. L. Sutton  
(1943) and Pasquill (1943) has given an expression for the *total* evaporation from  
a rectangular strip of length  $x_0$  downwind and width  $y_0$ :

$$E(x_0, y_0) = C(e_s - e'_a) u_2^{0.76} x_0^{0.88} y_0, \quad (4)$$

where  $C$  is a constant related to the absolute temperature,  $e'_a$  is the vapour pressure  
of the air at a height great enough to be unaffected by the evaporation, and  $u_2$   
the wind velocity at  $z = 2$  m. Although  $e'_a$  is unobservable, it has been possible to  
use the same general theory to express the shape of the hydrolapse, and to set  
 $(e_s - e_a) = \alpha(e_s - e'_a)$  where  $e_a$  is the measured value at screen height, and  $\alpha$  ( $\doteq 0.52$ )  
is almost independent of  $u$  and  $x_0$ . Differentiating (4), the rate of evaporation *at*  
 $x_0$  is obtained, and, substituting numerical values appropriate to zero temperature  
gradient, it becomes  $E = 0.11(e_s - e_a) u_2^{0.76} x_0^{-0.12}$  mm./day. (5)

In the open it is impossible to fix the position of the leading edge, but arbitrarily  
putting  $x_0 = 1.6 \times 10^8$  cm. (10 miles), the evaporation rate becomes

$$E = 0.376(e_s - e_a) u_2^{0.76} \text{ mm./day}, \quad (6)$$

where  $e_s$  and  $e_a$  are in mm. mercury, and  $u_2$  is now in miles/hr. If  $u_2$  is measured in  
miles/day—a practical convenience—the rate is

$$E = 0.033(e_s - e_a) u_2^{0.76} \text{ mm./day}. \quad (6a)$$

Notes. (1) The assumption of zero temperature gradient involves the identity of  
 $e_s$  and  $e_a$ , where  $e_a$  is the saturation vapour pressure at the mean air temperature;  
 $e_s - e_a$  then becomes  $e_a(1 - h)$ .

(2) A tenfold increase in  $x_0$  will decrease  $E$  in the ratio  $(1/10)^{0.12}$ , i.e. to 1/1.3,  
and the constant in (6a) will become 0.025.

(b) Energy balance

Certain simplifying assumptions are needed; where they are known to be reason-  
able, reliable estimates of evaporation are possible. Using as the unit of energy the  
amount required to evaporate 1/10 g. of water at air temperature (59 cal.) it is pos-  
sible to build up the following expression for the heat budget,  $H$ , taking into account  
the incoming short-wave radiation from sun and sky, and the long-wave exchanges  
between earth and sky (Brunt 1939; equation 15, p. 136; equation 25, p. 144):

$$H = R_c(1 - r - \mu) - \sigma T_a^4(0.56 - 0.092 \sqrt{e_a})(1 - 0.09m), \quad (7)$$

where  $R_C$  is the measured short-wave radiation/cm.<sup>2</sup>/day,

$r$  is the reflexion coefficient for the surface,

$\mu$  is the fraction of  $R_C$  used in photosynthesis,

$\sigma T_a^4$  is the theoretical black-body radiation at  $T_a$  °K,

$e_a$  is in mm. mercury,

and  $m/10$  is the fraction of sky covered with cloud.

Using the convenient symbols of Cummings & Richardson (1927), the heat budget is used in evaporation,  $E$ , heating of the air,  $K$ , heating of the test material,  $S$ , and heating of the surroundings of the test material,  $C$ , i.e.

$$H = E + K + S + C. \tag{8}$$

Over a period of several days, and frequently over a single day, the change in the stored heat,  $S$ , is negligible compared with other changes and the same may be true of the heat conducted through the walls of the test material container. Thus (8) can often be safely reduced to

$$H = E + K. \tag{9}$$

The transport of vapour and the transport of heat by eddy diffusion are, in essentials controlled by the same mechanism, and apart from the differences in the molecular constants, the one is expected to be governed by  $(e_s - e_a)$  where the other is governed by  $(T_s - T_a)$ . To a very good approximation, therefore, it is possible to write down the ratio of  $K/E$  in the form

$$K/E = \beta = \gamma(T_s - T_a)/(e_s - e_a), \tag{10}$$

where  $\beta$ , the ratio symbolized by Bowen (1926) as  $R$ , has the value  $-1$  in the standard wet and dry bulb hygrometer equation, and  $\gamma$  is the standard constant of this equation. In °F and mm. Hg,  $\gamma = 0.27$ .

Thus 
$$H = E(1 + \beta), \quad E = H/(1 + \beta). \tag{11}$$

Of the terms on the right-hand side of (7), the radiation term will rarely be directly measurable, but for periods of the order of a month or more it can be estimated from duration of sunshine. Angot has given tables of the total radiation to be expected if the atmosphere were perfectly transparent (Brunt (1939), p. 112), and there appears to be a general correlation between  $R_C/R_A$  and  $n/N$  in the form  $R_C/R_A = a + bn/N$ , where  $n/N$  is the ratio actual/possible hours of sunshine. For Virginia, U.S.A., Kimball (1914) finds  $a = 0.22$ ,  $b = 0.54$ ; for Canberra, Australia, Prescott (1940) finds  $a = 0.25$ ,  $b = 0.54$ . At Rothamsted, monthly values over the period 1931-40 lead to  $a = 0.18$ ,  $b = 0.55$ , with a suggestion of a seasonal variation. Using these latter constants we have

$$R_C = R_A(0.18 + 0.55n/N). \tag{12}$$

In terms of the maximum to be

agreeing with the form given b

The value of  $\mu$  is very small vary with season and type of s in the British Isles; for bare (Geiger (1927) quoting Angstro in (7) discriminating between t

The terms expressing the n due to Brunt and are based c correlations of the energy flow a diagram indicating values c  $\sigma T_a^4 f(e_a)$ . The uncertainty her from the cloudiness term. It must depend upon cloud type ance for this it is proposed to

$$H = E(1 + \beta) = (1$$

where  $R_A(0.18 + 0.55n/N)$  is t represented on the right-han necessary to obtain  $\beta$ , which 10). The sink strength approe ments can be made to meas the prediction of evaporation

(c) *Combinat*

From (1), expected to tak

Let  $E_a$  be the value of  $E$  ob

i.e.  $E_a/E$

From (10) and (11);

$$E = H$$

If we set  $T_s - T_a = (e_s - e_a)/$

$$H/E =$$

From (14) and (15);

in terms of the maximum to be expected ( $R_N$ ; for  $n = N$ ), equation (12) becomes

$$R_C = R_N(0.25 + 0.75n/N), \tag{12a}$$

agreeing with the form given by Angstrom for Stockholm (Brunt (1939), p. 127).

The value of  $\mu$  is very small (*c.* 0.005) and can be neglected. The value of  $r$  will vary with season and type of surface. For water its annual mean will be about 0.06 in the British Isles; for bare soil, about 0.10; and for turf might be about 0.20 (Geiger (1927) quoting Angstrom). Note that  $r$  and  $\beta$  will be the only effective factors in (7) discriminating between the different types of surface.

The terms expressing the net flow of radiation to and from a cloudless sky are due to Brunt and are based on the mean values of the constants obtained in six correlations of the energy flow with mean air temperature. Sverdrup (1945) gives a diagram indicating values of the same order but with slightly greater values of  $\sigma T_a^4 f(e_a)$ . The uncertainty here, however, is negligible compared with that arising from the cloudiness term. It is obvious that cloud control of long-wave radiation must depend upon cloud type, and as a provisional expedient to make some allowance for this it is proposed to set  $m/10 = 1 - n/N$ . Equation (7) therefore reduces to

$$H = E(1 + \beta) = (1 - r)R_A(0.18 + 0.55n/N) - \sigma T_a^4(0.56 - 0.092\sqrt{e_a})(0.10 + 0.90n/N) \tag{13}$$

where  $R_A(0.18 + 0.55n/N)$  is to be replaced by  $R_C$  when this is known. The parameters represented on the right-hand side of (13) are easily determined; to obtain  $E$  it is necessary to obtain  $\beta$ , which involves knowing the surface temperature (equation 10). The sink strength approach also involves this knowledge, and although arrangements can be made to measure it experimentally, it is desirable to eliminate it for the prediction of evaporation or for a survey of evaporation as a climatic element.

(c) *Combination of sink strength and energy balance*

From (1), expected to take the form of (6) or (6a), we have

$$E = (e_s - e_a)f(u). \tag{1}$$

Let  $E_a$  be the value of  $E$  obtained by putting  $e_a$  instead of  $e_s$ . Then

$$E_a = (e_a - e_a)f(u),$$

i.e.

$$E_a/E = 1 - (e_s - e_a)/(e_s - e_a) = 1 - \phi \text{ say.} \tag{14}$$

From (10) and (11);

$$E = H/(1 + \beta) = H/[1 + \gamma(T_s - T_a)/(e_s - e_a)].$$

If we set  $T_s - T_a = (e_s - e_a)/\Delta$ , where  $\Delta$  is the slope of the  $e : T$  curve at  $T = T_a$ , then

$$H/E = 1 + \gamma(e_s - e_a)/\Delta(e_s - e_a) = 1 + \gamma\phi/\Delta. \tag{15}$$

From (14) and (15);

$$E = (H\Delta + E_a\gamma)/(\Delta + \gamma), \tag{16}$$

$$e_s = (e_a - \phi e_a)/(1 - \phi), \tag{17}$$

/day,

$T_a$  °K,

rdson (1927), the heat budget of the test material,  $S$ , and e.

(8)

single day, the change in the changes and the same may be test material container. Thus,

(9)

ddy diffusion are, in essentials, ie differences in the molecular  $e_a$ ) where the other is governed e, it is possible to write down

(10)

has the value  $-1$  in the stan- the standard constant of this

$\beta$ ).

(11)

adiation term will rarely be a month or more it can be tables of the total radiation parent (Brunt (1939), p. 112),  $R_C/R_A$  and  $n/N$  in the form sible hours of sunshine. For .54; for Canberra, Australia, ed, monthly values over the stion of a seasonal variation.

(12)

i.e.  $E$  can be estimated from air conditions only, and, if required, an estimate of surface temperature can be obtained that might be useful outside evaporation studies.

In addition to the constants, readily obtainable from standard sources, the weather parameters needed are mean air temperature, mean dewpoint, mean wind velocity at a standard height and mean duration of sunshine.

### 3. ROTHAMSTED EXPERIMENT 1944, 1945

#### (a) *Experimental site*

Experiments have been carried out in the meteorological enclosure at Rothamsted, situated at about 420 ft. above o.d. in open parkland in the Chiltern Hills. The enclosure includes a brick-lined pit, 8 ft. deep and 20 ft. diameter, around which twelve cylinders were set in the soil in 1924, five of them being filled with a sand loam from Woburn (Bedfordshire), the soil texture being uniform throughout. The cylinders are 6 ft. deep and 2 ft. 6 in. diameter and are made of cast iron lined with a  $\frac{1}{2}$  in. layer of bitumen painted concrete; the bottoms have a slope down to an outlet pipe accessible from the pit. (See figure 1 and figure 7, plate 3.)

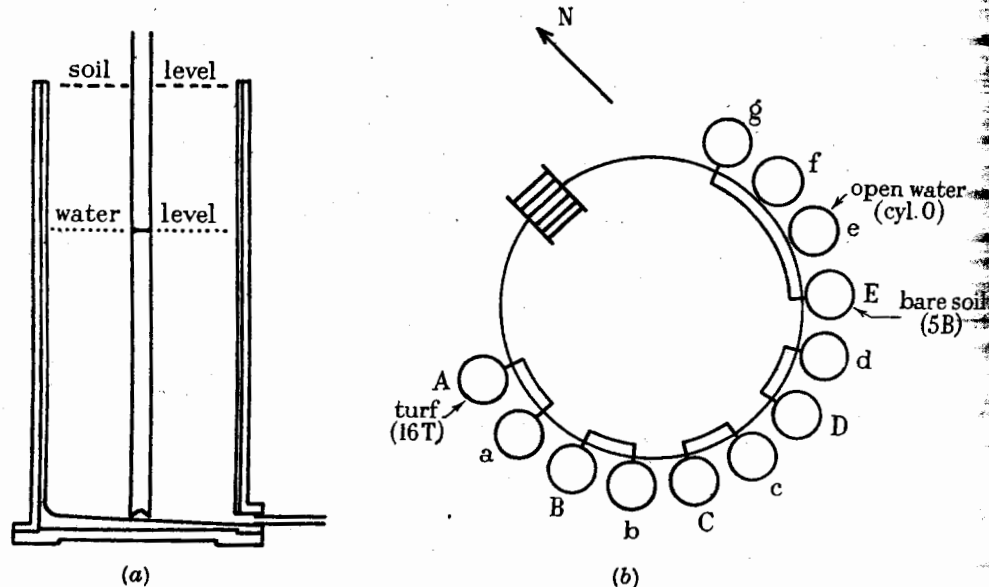


FIGURE 1. (a) Section of cylinder, and (b) plan of the pit.


The soil was left to settle and weather for 16 years so that some semblance of natural structure could be attained and by May 1940 the settlement amounted to 6 in. This was made good by a further supply of Woburn soil, experimental work was done in 1941 and 1942 and in the spring of 1944 there was a further slight topping up in preparation for the work now to be described.

and, if required, an estimate of  
be useful outside evaporation

le from standard sources, the  
re, mean dewpoint, mean wind  
sunshine.

1944, 1945

ogical enclosure at Rothamsted,  
and in the Chiltern Hills. The  
20 ft. diameter, around which  
them being filled with a sandy  
being uniform throughout. The  
re made of cast iron lined with  
oms have a slope down to an  
figure 7, plate 3.)

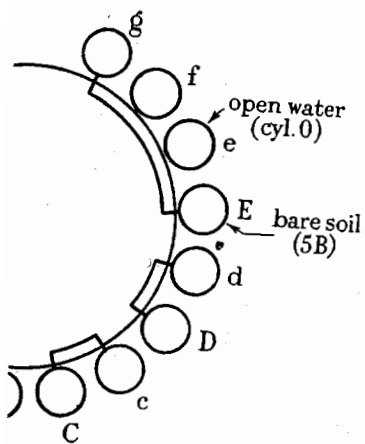

plan of the pit.

s so that some semblance of  
the settlement amounted to  
burn soil, experimental work  
re was a further slight topping



FIGURE 7. The experimental site June 1944, looking north-east.



Ten cylinders were joined up in pairs at the outlets, each soil cylinder being connected to an unfilled cylinder referred to below as the 'minor', so forming a set of tubes. Figure 1 shows the arrangement schematically, with three cylinders labelled (O, 5B and 16T). These are the main ones to be discussed and were the same in both years; changes were made in the others early in 1945. Waterproof covers were provided for the minors to prevent entry of rain and to reduce evaporation losses to negligible amounts. On A and C curves were laid in April 1944 and on D in March 1945; the other soil surfaces were kept bare.

At the outset the minors were filled with water until the soil or turf surfaces were flooded and then water was run out until the water-table had reached a pre-determined depth below the soil surface. The depths and the nature of the surface are given in table 1:

TABLE 1. DEPTHS (IN.) OF WATER-TABLE AND NATURE OF SURFACE

| cylinder ... | A      | B      | C      | D      | E     |
|--------------|--------|--------|--------|--------|-------|
| 1944         | 16 (T) | 16 (B) | 10 (T) | 10 (B) | 5 (B) |
| 1945         | 16 (T) | 24 (B) | 24 (T) | 36 (T) | 5 (B) |

Cylinder e was filled to near the brim and the level kept at about 1 in. below. This was the first open water standard, referred to as cylinder O. In the early summer of 1945 a tank of sheet galvanized iron, 2 ft. 6 in. diameter and 2 ft. deep was supplied by the Meteorological Office and was set up at the north end of the enclosure about 50 yd. north of the pit. A hole 1 ft. 9 in. deep was dug into which the tank fitted firmly, and the water-level was kept at or near ground level, so leaving a projecting rim of 3 in. This tank, referred to as tank MO, had the same area as the cylinder but was shallower, had a thinner and more conducting wall material, was completely surrounded by turf-covered soil whereas the other had the pit on one side, and had a higher effective rim.

Ground level round the cylinders had been raised so that soil level was the same inside and out except on one side of cylinder O where the topping up was not complete; for all the cylinders there was a big discontinuity in surface on the pit side and although the pit should have been roofed in, it was not practicable at the time and a major objection to the experimental site had to be accepted as unavoidable. Figure 7, plate 3, shows the exposure to the north-east and the disposition of some of the other components of the enclosure; in the centre, beyond the pit, is the large rain gauge (1/1000 acre) used for rainfall values employed below, and to the right of it are visible two of the bare drain gauges on which earlier Rothamsted work was based. The general exposure here is good, although the presence of the large gauges might affect local eddies with east and north-east winds. The general exposure to north-west was equally good, that to south-west a little worse, and that to south-east poorest of all due to an extended belt of trees, the nearest being about 80 yd. away.

The surround varied during the experiment. The local exterior topping up remained bare for a while, but a crop of weeds soon developed and gave a local cover nearly enough equivalent to the turf of the enclosure. By the summer of 1945 there

was a fair amount of grass in this and it was possible to cut it with a mower. Growth was very rapid during 1945 and part of the surround, too rough for a mower, got out of hand and for a while there was a stand of tall grass on the west side which may have had an adverse effect on transpiration from cylinder A (16T). In both years the field to the east was sown with mangolds giving a green cover from June until late autumn at which time the soil surface was moist and remained moist for the remainder of the winters. The field to north and west carried an oat crop in 1944, about 1 ft. high in May, 3 ft. high throughout July and harvested in early August; the undersown clover then provided a green cover for the remainder of the season, was grazed during 1945, but grew away from the animals and a hay crop was eventually taken from it. To the south there was a pasture, kept short by grazing. Thus, except for short periods, the experimental surfaces could be reasonably described as being in the midst of an extensive area of short vegetation and as long as this transpired at maximal rate, then for so long did the experimental conditions come close to satisfying the basic assumptions from which equation (6) was derived.

(b) *Measurements and calibrations*

In addition to the normal 09.00 observations of a third-order meteorological station, supplementary measurements were made.

(i) *Temperature.* Mercury-in-steel thermographs were set up on cylinders C, D, and O; that on D was transferred to tank MO in June 1945. The long bulbs were horizontal and were either pressed into the soil or supported in the water so that about half was below the surface and half above the surface; the water bulbs had sheaths of muslin to ensure that they were always wet all over. They were calibrated in place, and in all cases the corrected 'surface' temperature is more truly the mean temperature of the top few mm. of soil or water. To find the daily mean a smooth curve was drawn through the thermogram and a mean of six readings at 4 hr. intervals found; this was corrected from the calibration curve and the corresponding value of the saturation vapour pressure taken as the daily mean value of  $e_s$ .

Only one value of the dewpoint was obtained per day and although this was found to be adequate for long period surveys it was not always adequate for individual days, particularly where there was a pronounced change during the day. The Dunstable Branch of the Meteorological Office kindly supplied estimates of the dewpoint at 6 hr. intervals for each day and from these it was possible to see the way in which the dewpoint had changed in a given period of 24 hr. and to weight the Rothamsted values accordingly. Obtaining a reliable daily mean value of the dewpoint remains one of the main experimental problems to be solved.

The mean air temperature is never of first order of importance and it has been sufficient to take the conventional mean of maximum and minimum for this parameter.

(ii) *Wind.* A three-cup anemometer was set up at 2 m. in the south-west corner of the enclosure in 1944, and was moved to the middle of the enclosure early in 1945 so as to be about half-way between the pit and the new MO tank. The scale reading

was read once daily, and in view of as the unit of wind velocity (equ calibrated in December 1944 in with which a calibration curve was and calibration of the experime region: table 2 shows the result:

TABLE 2. CALIBR.

|           |    |    |
|-----------|----|----|
| observed  | 0  | 30 |
| corrected | 38 | 50 |

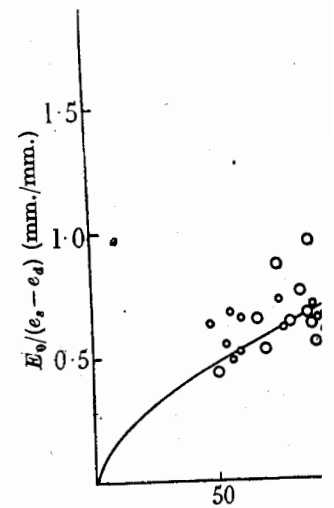


FIGURE 2. Daily evaporation per (cylinder O). The cur

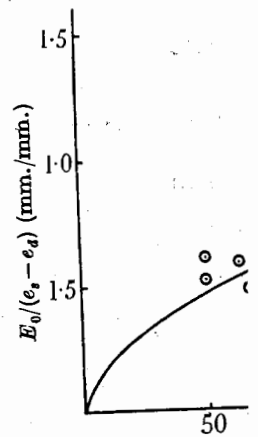


FIGURE 3. Daily evaporation (tank MO)

to cut it with a mower. Growth was too rough for a mower, got out on the west side which may have been A (16T). In both years the field was mowed from June until late autumn. The soil was moist for the remainder of the season, and in 1944, about 1 ft. high in early August; the undersown crop of the season, was grazed during the winter. The crop was eventually taken from it for grazing. Thus, except for short periods, the field was probably described as being in the natural conditions come close to the conditions in (6) was derived.

Measurements of a third-order meteorological

were set up on cylinders C, D, E in June 1945. The long bulbs were supported in the water so that they were at the surface; the water bulbs had a temperature more truly the mean of six readings at 4 hr. in a curve and the corresponding daily mean value of  $e_s$ .

and although this was found to be inadequate for individual days, during the day. The Dunstable estimates of the dewpoint at the time to see the way in which the dewpoint and to weight the Rothamsted value of the dewpoint remains

of importance and it has been found to be a maximum and minimum for this para-

2 m. in the south-west corner of the enclosure early in 1945 in the MO tank. The scale reading

was read once daily, and in view of this it was an obvious convenience to use miles/day as the unit of wind velocity (equation (6a); figures 2 and 3). The instrument was calibrated in December 1944 in terms of a similar instrument with smaller cups, with which a calibration curve was supplied. The curve was non-linear at low speeds and calibration of the experimental instrument is consequently uncertain in this region: table 2 shows the result:

TABLE 2. CALIBRATION OF ANEMOMETER (MILES/DAY)

|           |    |    |    |     |     |     |     |     |
|-----------|----|----|----|-----|-----|-----|-----|-----|
| observed  | 0  | 30 | 60 | 90  | 120 | 150 | 210 | 270 |
| corrected | 38 | 50 | 78 | 106 | 133 | 161 | 215 | 272 |

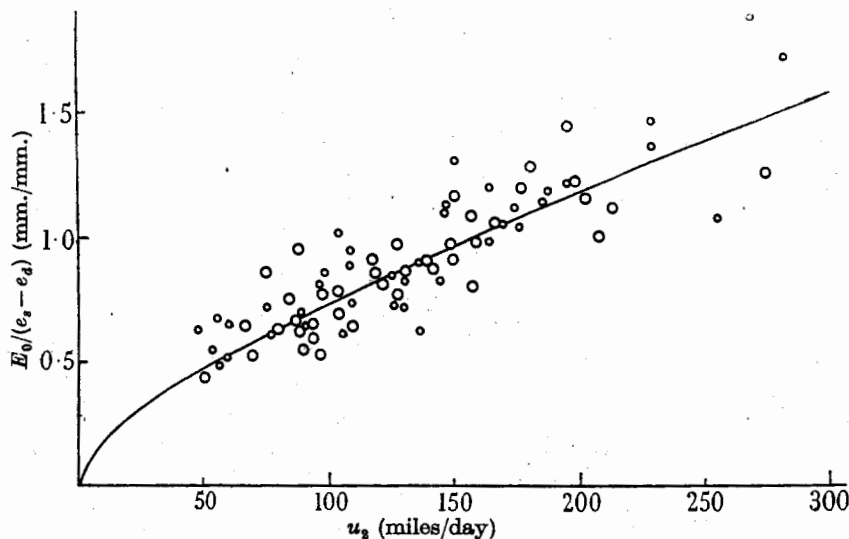


FIGURE 2. Daily evaporation per unit partial pressure difference for open water surface (cylinder O). The curve is:  $E_0/(e_s - e_a) = 0.033u_2^{0.68}$ ,  $\circ$  1944,  $\bigcirc$  1945.

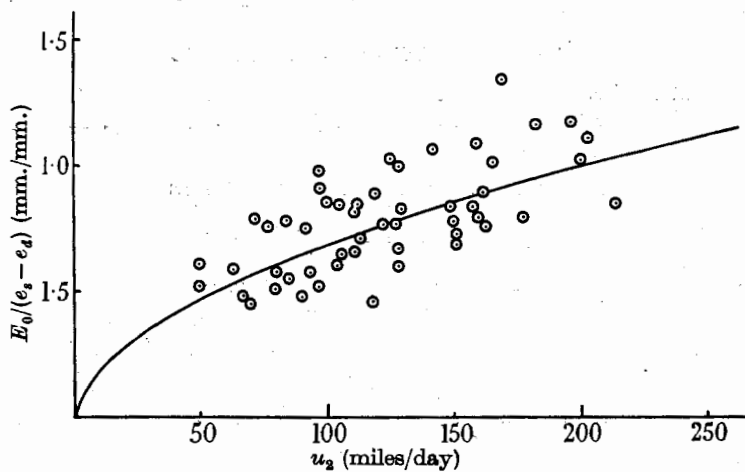


FIGURE 3. Daily evaporation per unit partial pressure difference for open water surface (tank MO). The curve is:  $E_0/(e_s - e_a) = 0.065u_2^{0.64}$ .

A Dines wind recorder on the laboratory roof, about  $\frac{1}{4}$  mile away, was used to estimate direction and variation of wind speed during the day, where necessary.

(iii) *Radiation.* A continuous record of radiation intensity on a horizontal surface was obtained each day, the total area under the trace measured by planimeter and the figure so obtained converted to the equivalent number of mm. of water that the total energy would evaporate at air temperature.

The duration of sunshine was obtained from a Campbell-Stokes recorder.

(iv) *Evaporation.* Daily measurements were made of the depth of the water levels below arbitrary zeroes.

*Cylinders A, B, C and D.* A rigid cradle was built into the top of the minor into which could be fitted a framework carrying a screw ending in a sharp pointed dipstick. The screw carried a scale that moved past a fixed index mark and readings could be made to better than  $\frac{1}{2}$  mm. except on very windy days.

*Cylinders E and O.* Measurements here were somewhat cruder. A solid straight edge was placed across the top of the minor in a marked position and, by means of a guide, a pointed rule was slid down until it just touched the water surface. With care, readings could be reproduced to within about  $\frac{1}{2}$  mm., and in the major part of the experiment this was adequate accuracy.

*Tank MO.* A hook gauge reading to  $\frac{1}{100}$  in. was used.

Changes in level are due to evaporation or rainfall, both being excluded from the minors. A fall in level takes place in both arms of the U system when evaporation occurs, so that for a change in minor level of  $\delta z$ , the total evaporation is greater and may be set equal to  $\delta z(1 + \lambda)$ , where  $\lambda$  is the specific yield of the soil with water table at  $z$  cm. below the surface. If, over a period, the measured rainfall is  $R$ , then the total evaporation is given by

$$E = \delta z(1 + \lambda) + R. \tag{1}$$

As  $\lambda$  is a function of  $z$ , measurements were made to give the values in table 3.

TABLE 3. SPECIFIC YIELD OF SOIL

| depth of water-table (in.)          | 5    | 10   | 16   | 24   | 36   |
|-------------------------------------|------|------|------|------|------|
| specific yield, $\lambda$ (cm./cm.) | 0.02 | 0.04 | 0.10 | 0.13 | 0.13 |

4. RESULTS FOR INDIVIDUAL DAYS

(a) *Open water: sink strength*

Equation (6a) was tested by plotting  $E_0/(e_s - e_a)$  against  $u_2$ . Figure 2 shows the result for cylinder O with the 1944 and 1945 data distinguished, figure 3 shows the result for tank MO from mid-June 1945, and in figure 4 are given values of  $\Sigma E_0/\Sigma(e_s - e_a)$  for wind speed ranges sufficiently wide to include at least four observations in the summations. The data represented in these figures have been selected as follows: (i) rain days have been excluded as there is some uncertainty about the uniformity of rainfall distribution over the site; on such a day the fall in level is made up of evaporation minus rainfall. (ii) For cylinder O, only those days have

been used in which  $E_0 > 2.5$  m the number of available results errors tend to be absolute and  $\Delta e$  become very small.

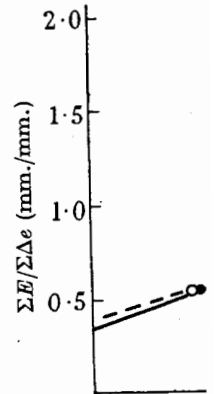


FIGURE 4. Mean daily evaporation of days having approximately  $E_0/(e_s - e_a) = 0.35(1 + 9.8 \times 10^{-3} u_2)$

The scatter in figures 2 and by other workers doing indoor contributory factors have been of the surround, wind distribution year. The main sources are un in increasing order of importance and wind velocity: whether a measurement at ground level are sufficient to surface; they cannot be expected by many obstructions and sun and an analysis of the cylinder  $u_2$  were for days with north-be most conducive to extra greater scatter, the tank M than the cylinder O results, Rohwer's results. (Because differ significantly.) The mean  $E/(e_s - e_a)$  and  $u_2$ , but for coefficients: (i) through the overall (cf. equation 6a) and, (ii) th

¼ mile away, was used to estimate the day, where necessary. The intensity on a horizontal surface was measured by planimeter and number of mm. of water that the

apbell-Stokes recorder. The depth of the water-

into the top of the minor into ending in a sharp pointed dip-index mark and readings windy days.

ewhat cruder. A solid straight ked position and, by means of uched the water surface. With ½ mm., and in the major part

ed. both being excluded from the U system when evaporation e total evaporation is greater, fic yield of the soil with water- ie measured rainfall is  $R$ , then

(18)

give the values in table 3.

F SOIL

|      |      |      |
|------|------|------|
| 16   | 24   | 36   |
| 0.10 | 0.13 | 0.13 |

2 DAYS

ngth

against  $u_2$ . Figure 2 shows the distinguished, figure 3 shows the figure 4 are given values of to include at least four obser- these figures have been selected is some uncertainty about the such a day the fall in level is nder O, only those days have

en used in which  $E_0 > 2.5$  mm. and  $(e_s - e_a) > 2.5$  mm.; for tank MO, to increase the number of available results, the limits were lowered to 2.0 mm. The experimental errors tend to be absolute and the uncertainty in the ratio increases greatly as  $E_0$  and  $\Delta e$  become very small.

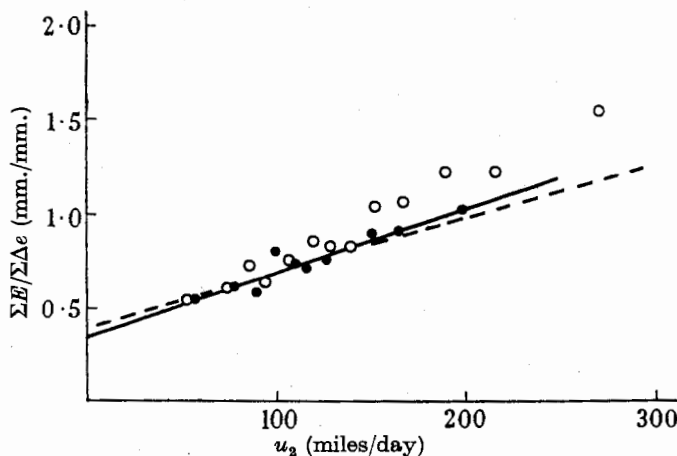


FIGURE 4. Mean daily evaporation per unit partial pressure difference for open water (groups of days having approximately the same average wind speed). The continuous line is:  $E_0/(e_s - e_a) = 0.35(1 + 9.8 \times 10^{-3} u_2)$ . O cylinder O; —●— tank MO; --- Rohwer.

The scatter in figures 2 and 3, although not very much worse than that obtained by other workers doing indoor experiments, is considerable. A number of obvious contributory factors have been examined and shown to be of slight effect: dryness of the surround, wind distribution during the day, height of rim and season of the year. The main sources are undoubtedly the meteorological observations themselves; in increasing order of importance they are: dewpoint and surface temperature determinations and wind velocity measurements. Concentrating on the last, it is doubtful whether a measurement at a single height and the assumption of zero velocity at ground level are sufficient to define the wind velocity profile even over a smooth surface; they cannot be expected to take account of the local turbulence introduced by many obstructions and surface irregularities. These will vary with wind direction, and an analysis of the cylinder O results showed that all high values of  $E/\Delta e$  at high  $u_2$  were for days with north-east winds, i.e. days in which the local exposure would be most conducive to extra turbulence. It seems, therefore, that in spite of their greater scatter, the tank MO results are probably a better guide to a general law than the cylinder O results, and this is supported by the comparison (figure 4) with Rohwer's results. (Because of the scatter it is probable that the mean curves do not differ significantly.) The mean curves show that there is a linear relationship between  $E/(e_s - e_a)$  and  $u_2$ , but for comparison with the theoretical form two curves could be fitted: (i) through the overall mean value of  $E/\Delta e$  and of  $u_2$ , a curve  $E/\Delta e = bu_2^{0.76}$  (cf. equation 6a) and, (ii) through the two general means obtained from the groups

of points lying to the left and right of the overall mean, a curve  $E/\Delta e = au_2^2$ . The results, in decreasing order of efficiency, are given in table 4.

TABLE 4. VALUES OF  $f(u)$  IN  $E_0 = (e_s - e_d) f(u)$

|      | cylinder O                         | tank MO                           | Rohwer*                           |
|------|------------------------------------|-----------------------------------|-----------------------------------|
| best | $0.30(1 + 14.2 \times 10^{-3}u_2)$ | $0.35(1 + 9.8 \times 10^{-3}u_2)$ | $0.40(1 + 7.1 \times 10^{-3}u_2)$ |
| good | $0.033u_2^{0.68}$                  | $0.065u_2^{0.54}$                 | —                                 |
| fair | $0.021u_2^{0.76}$                  | $0.019u_2^{0.76}$                 | —                                 |

The curves drawn in figures 2 and 3 are the 'good' curves, wind velocities being in miles per day.

From the above, it is concluded that: (i) the best form of (1) for practical use is

$$E_0 = 0.35(1 + 9.8 \times 10^{-3}u_2)(e_s - e_d) \text{ mm./day, } u_2 \text{ in m.p.d.;} \quad (19)$$

(ii) for analysis, demanding a curve passing through the origin, the power of the wind velocity is much nearer  $\frac{1}{2}$  than  $\frac{3}{4}$ ; (iii) if the form of equation (6a) is to be maintained, the constant is to be reduced from 0.033 to about 0.020, a result that may be due to inaccurate assumptions about the distance away of the hypothetical 'leading edge', may be due to the departure from zero temperature gradient, or may be due to an inaccurate value of  $\alpha$  in specifying the shape of the hydro-lapse.

(b) Open water: energy balance

The initial objective in this approach was an application to extended periods in which the assumptions made in reducing (8) to (9) would be reasonable; the main discussion will be of this aspect and appears below, but in view of its success it seemed worth while extending the application to individual days. An estimate of  $E_{MO}$ , based on energy, was obtained for most days between mid-June and the end of September 1945 and results are shown in figure 5 and table 5. The latter includes a representative sample of the data of the figure, the choice being made at roughly 6-day intervals with an attempt to give reasonable ranges of wind velocities and sunshine conditions, and affords a comparison of the estimates based on energy balance and sink strength (equation 19) with each other and with the observed values of daily evaporation. The values of  $(e_s - e_d)$  range from 1.10 to 7.40 mm., those of  $\sigma T^4$  from 13.6 to 14.8, those of  $(0.56 - 0.092\sqrt{e_d})$  from 0.30 to 0.26, the product of the last two functions tending to be constant, and those of  $(0.10 + 0.90n/N)$  from 0.10 to 0.70. From the last, it will be seen that the most important term in the back radiation is the cloudiness factor—the least certain of any. Although they could be deduced from other columns, values of  $\beta$  are given. The figure is extremely encouraging. With the table it shows that the energy balance estimate is too big in mid-summer but improves later in the year. The change in the reflexion coefficient (here taken as constant throughout) would act in the opposite sense, and apart from

\* Wing-Cdr Frost, in a private communication, has stated that observations at Poona, India, which were reduced to the form  $E/\Delta e = au^{0.38}$  by the experimenters can be equally well fitted by

$$E = 0.40(1 + 7.3 \times 10^{-3}u_2)(e_s - e_d) \text{ mm./day.}$$

This is almost indistinguishable from the Rohwer equation.

any deficiencies in (13) itself it is the warming of the bottom of the soil so producing a positive value therefore, leads to an over-estimate

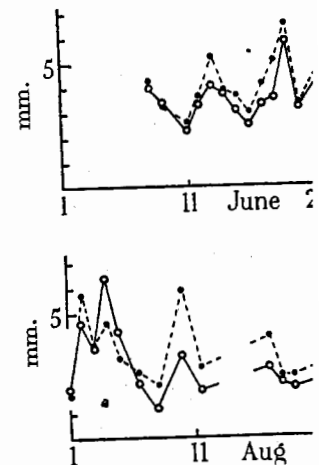


FIGURE 5. Comparison of the observed estimates based on the energy balance for Year 1945.

TABLE 5. ENERGY BALANCE COMPARED WITH THE OBSERVED (EQUATION 19)

| date 1945 | $u_2$ (m.p.d.) | $0.95R_c$ (mm./day) |
|-----------|----------------|---------------------|
| June 11   | 149            | 4.36                |
| 16        | 80             | 5.62                |
| 22        | 92             | 8.28                |
| 27        | 118            | 7.19                |
| July 1    | 197            | 7.16                |
| 8         | 96             | 8.49                |
| 12        | 50             | 8.19                |
| 17        | 111            | 6.45                |
| 23        | 128            | 9.09                |
| 30-31     | 129            | 3.72                |
| Aug. 3    | 67             | 7.58                |
| 8         | 80             | 3.65                |
| 17        | 122            | 5.65                |
| 23        | 182            | 5.00                |
| 26        | 63             | 7.23                |
| Sept. 2   | 196            | 5.40                |
| 8         | 128            | 1.90                |
| 9         | 50             | 1.40                |
| 14        | 133            | 1.70                |
| 22        | 169            | 4.50                |
| 27        | 146            | 3.10                |

mean, a curve  $E/\Delta e = au_2^n$ . The table 4.

$$e_s - e_d) f(u)$$

Rohwer\*

$$u_2) 0.40(1 + 7.1 \times 10^{-3}u_2)$$

curves, wind velocities being

form of (1) for practical use is  
 say,  $u_2$  in m.p.d.; (19)

at the origin, the power of the  
 form of equation (6a) is to be  
 about 0.020, a result that  
 is far away of the hypothetical  
 zero temperature gradient, or  
 the shape of the hydro-lapse.

since

application to extended periods in  
 would be reasonable; the main  
 but in view of its success it  
 individual days. An estimate of  
 between mid-June and the end  
 in table 5. The latter includes  
 choice being made at roughly  
 ranges of wind velocities and  
 the estimates based on energy  
 other and with the observed  
 range from 1.10 to 7.40 mm.,  
 $2\sqrt{e_d}$  from 0.30 to 0.26, the  
 , and those of  $(0.10 + 0.90n/N)$   
 the most important term in  
 certain of any. Although they  
 given. The figure is extremely  
 balance estimate is too big in  
 ge in the reflexion coefficient  
 opposite sense, and apart from  
 ed that observations at Poona,  
 experimenters can be equally well  
 n./day.

inefficiencies in (13) itself it is probable that the main cause of the over-estimate  
 warming of the bottom of the tank to a higher temperature than the outside  
 so producing a positive value of the factor  $C$  in (8). The neglect of  $C$  in (9),  
 before, leads to an over-estimate of  $H$  and hence of  $E$ .

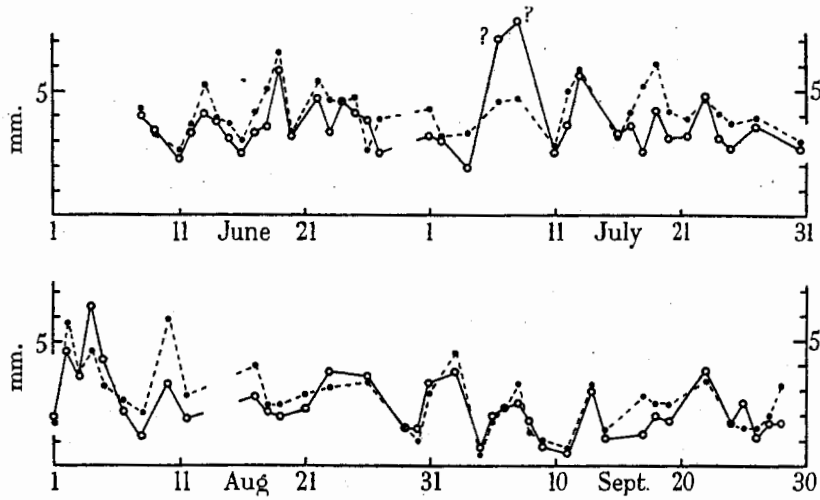


FIGURE 5. Comparison of the observed daily evaporation from open water (tank MO) and estimates based on the energy balance. —○— observed; ---●--- energy balance estimate. 1945.

TABLE 5. ENERGY BALANCE ESTIMATE FOR TANK MO FOR INDIVIDUAL DAYS, COMPARED WITH THE OBSERVED VALUE AND THE SINK STRENGTH ESTIMATE (EQUATION 19)

| date<br>1945 | $u_2$<br>(m.p.d.) | $0.95R_0$<br>(mm./day) | $H$<br>(mm./day) | $\beta$ | evaporation (mm./day)      |                |                      |
|--------------|-------------------|------------------------|------------------|---------|----------------------------|----------------|----------------------|
|              |                   |                        |                  |         | estimates<br>$H/(1+\beta)$ | $\Delta ef(u)$ | observed<br>$E_{MO}$ |
| June 11      | 149               | 4.36                   | 3.64             | 0.37    | 2.6                        | 2.4            | 2.3                  |
| 16           | 80                | 5.62                   | 4.52             | 0.48    | 3.0                        | 2.7            | 2.5                  |
| 22           | 92                | 8.28                   | 5.58             | 0.03    | 5.4                        | 4.2            | 4.7                  |
| 27           | 118               | 7.19                   | 4.82             | 0.35    | 3.9                        | 4.1            | 2.5                  |
| July 1       | 197               | 7.16                   | 5.01             | 0.16    | 4.3                        | 4.7            | 3.2                  |
| 8            | 96                | 8.49                   | 5.98             | 0.28    | 4.7                        | 4.8            | 7.8?                 |
| 12           | 50                | 8.19                   | 5.80             | 0.15    | 5.0                        | 3.1            | 3.6                  |
| 17           | 111               | 6.45                   | 4.78             | 0.15    | 4.2                        | 3.2            | 3.6                  |
| 23           | 128               | 9.09                   | 5.76             | 0.23    | 4.7                        | 5.7            | 4.8                  |
| 30-31        | 129               | 3.72                   | 2.78             | -0.07   | 3.0                        | 2.6            | 2.7                  |
| Aug. 3       | 67                | 7.58                   | 4.11             | 0.12    | 3.6                        | 4.3            | 3.6                  |
| 8            | 80                | 3.65                   | 2.67             | 0.25    | 2.1                        | 1.4            | 1.2                  |
| 17           | 122               | 5.65                   | 3.76             | -0.07   | 4.0                        | 2.8            | 2.8                  |
| 23           | 182               | 5.00                   | 3.43             | 0.06    | 3.2                        | 3.2            | 3.8                  |
| 26           | 63                | 7.23                   | 3.90             | 0.17    | 3.4                        | 3.4            | 3.6                  |
| Sept. 2      | 196               | 5.40                   | 3.70             | -0.18   | 4.5                        | 3.3            | 3.8                  |
| 8            | 128               | 1.90                   | 1.53             | 0.15    | 1.3                        | 1.4            | 1.8                  |
| 9            | 50                | 1.43                   | 1.07             | 0.04    | 1.0                        | 0.8            | 0.8                  |
| 14           | 133               | 1.72                   | 1.36             | -0.02   | 1.4                        | 0.9            | 1.1                  |
| 22           | 169               | 4.52                   | 2.34             | -0.31   | 3.4                        | 2.3            | 3.8                  |
| 27           | 146               | 3.17                   | 1.63             | -0.17   | 2.0                        | 2.3            | 1.7                  |

From the table the sink strength estimates based on the fitted curve appear to be a little better than the energy balance estimates. The correlation coefficients between observed and estimated values are about 0.80 in each case, and when remembered that the fitting has reduced the sink strength estimate to about 60% of its theoretical value it is apparent that on the basis of the original predictions the energy balance estimate is the better. The two estimates agree on 8 July when the observed value was extremely high and was queried at the time of observation. In open country there are several causes of spurious high readings; rabbits and birds appreciate an open pool on a hot day and although the enclosure was refitted with wire netting for this experiment it is impracticable to take measures to ensure 100% freedom from intrusion. Leaks are usually unidirectional and although a big leak is easily noticed, a small one, particularly if variable, could easily be overlooked. Replication is the only safe control here, and the close agreement of the sink strength results for cylinder O and tank MO is regarded as confirmation of the general water-tightness of both containers.

(c) *Evaporation on individual days (other surfaces)*

No detailed analysis has been attempted, for two reasons. With water-tables some distance below the surface there is always some drying out of the soil above the water-table that does not affect the water-table, so that on rain-free days the movement of the water-table does not represent all the evaporation taking place. On a rain day, no rise in water-table will occur until this accumulated deficit moisture has been made up and on such days the estimate of evaporation based on water-table movement and rainfall will be excessive.

The second reason is that changes in soil temperature from day to day produce changes in the surface tension of the water held in the soil above the water-table and slight water movements take place accordingly. During dry periods the movements of the water-table in cylinder 24B were due almost entirely to temperature changes and evaporation was negligible by comparison.

Over an extended period the effect of temperature changes under the saturated surfaces is negligible; if the period is chosen so that its beginning and end are marked by a rise in water-table due to rain then one can be sure that the soil moisture content above the water-table is the same at beginning and end, and (18) can be applied with confidence. Such periods have been termed 'natural periods' (Penman & Schofield 1941) and are the basis of the ensuing discussion.

5. EVAPORATION IN NATURAL PERIODS

(a) *General*

The main discussion will be confined to the open water surfaces, the bare soil with water-table at 5 in. and the turf with water-table at 16 in., but it will be useful to give a brief account of the performance of other cylinders. The bare soil cylinders with water-tables at 10, 16 and 24 in. failed to satisfy the condition of continuous

saturation at the surface; the first was of rainfree weather and the other two one or two after rain. Under turf, the proper development of the water-table is slightly less than for cylinder 16T. The sink strength is about the same for cylinders 16T and 16B; the turf over the deeper water-table itself with the same luxuriance as that over the latter; the turf over the deeper water-table from the results.

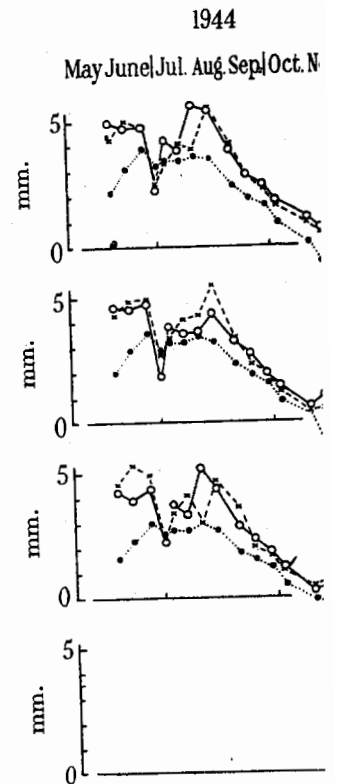


FIGURE 6. Mean daily evaporation from open water supply. (Open-water: O and MO. Energy balance: ●) —○— water-table at 16 in.: 16T.) —●— energy balance and ● combined

The results of 18 months for cylinders are shown in figure 6, and with a few supplementary explanatory. Apart from the large amount of water from being obtained, there are considerable differences were unobtainable. The lines drawn were to follow seasonal changes.



n

used on the fitted curve appear...  
 nates. The correlation coefficient...  
 it 0.80 in each case, and when it...  
 strength estimate to about 60...  
 basis of the original predictions...  
 estimates agree on 8 July when...  
 ied at the time of observation...  
 s high readings; rabbits and bir...  
 gh the enclosure was refitted wi...  
 to take measures to ensure 100...  
 rectional and although a big lea...  
 iable, could easily be overlooked...  
 ose agreement of the sink strength...  
 d as confirmation of the genera...

ys (other surfaces)

wo reasons. With water-tables at...  
 some drying out of the soil above...  
 ble, so that on rain-free days the...  
 all the evaporation taking place...  
 until this accumulated deficit of...  
 estimate of evaporation based on...  
 ve.  
 erature from day to day produce...  
 he soil above the water-table and...  
 uring dry periods the movements...  
 entirely to temperature changes...  
 ure changes under the saturated...  
 its beginning and end are marked...  
 ure that the soil moisture content...  
 end, and (18) can be applied with...  
 al periods' (Penman & Schofield...

L PERIODS

en water surfaces, the bare soil...  
 ble at 16 in., but it will be useful...  
 yinders. The bare soil cylinders...  
 isfy the condition of continuous...

ation at the surface; the first showed signs of drying during extended periods  
 infree weather and the other two were almost continuously dry except for a  
 or two after rain. Under turf, the water-table at 10 in. was probably too high  
 the proper development of the plant, and both growth and transpiration were  
 ly less than for cylinder 16T; the 1945 results showed transpiration to be  
 at the same for cylinders 16T and 24T, although the crop yield was greater on  
 latter; the turf over the deepest water-table (cylinder 36T) failed to establish  
 with the same luxuriance as the others and little of any value has yet emerged  
 the results.

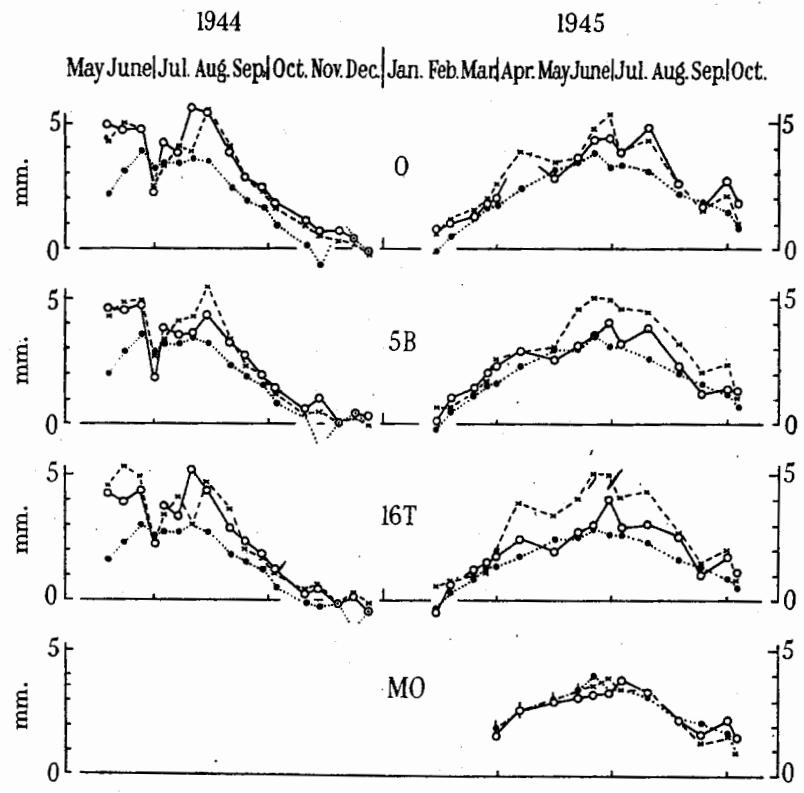


FIGURE 6. Mean daily evaporation in natural periods for surfaces with non-limiting water supply. (Open-water: O and MO. Bare soil with water-table at 5 in.: 5B. Turfed soil with water-table at 16 in.: 16T.) —○— Observed valves. Estimates: --x-- sink strength, ●●● energy balance and ◆ combined.

The results of 18 months for cylinders O, 5B, 16T and tank MO are summarized in figure 6, and with a few supplementary notes the figure should be almost self-explanatory. Apart from the large winter gap, when snow and ice prevented readings from being obtained, there are one or two minor gaps of a few days when records were unobtainable. The lines drawn have no significance other than helping the eye to follow seasonal changes.

The sink strength estimates are based on the mean wind velocity for the period and the mean values of  $T_s$  and  $T_a$  from which  $e_s$  and  $e_a$  were derived. For cylinders O, 5B and 16T the linear expression derived for cylinder O was used (table 1, column 1); for tank MO the corresponding equation (19) was used.

The radiation estimates are based on (13) and (9), using reflexion coefficients of 0.05, 0.10 and 0.20 for open water, bare soil and turf respectively; for cylinders O and tank MO, therefore, the value of  $H$  was the same, but the values of  $\beta$  were not necessarily the same, depending upon the values of the surface temperatures.

As the surface temperature of tank MO was not measured until mid-June 1945 the combined estimate (equation 16) was made for the preceding natural periods.

#### (b) Comments and conclusions

(i) For cylinder O the sink strength estimate is a reasonably good fit throughout suggesting that in selecting results for figure 2 there has been no undue bias.

(ii) For cylinders 5B and 16T the sink strength estimate is good in 1944 but too big in 1945. It is difficult to interpret the turf results as the thermometer bulb was usually covered by growing grass of varying length; perhaps one ought to be surprised at such an exposure combined with a formula based on open water leading to results so near observation. In the case of the bare soil, a reasonable explanation is available. During the summers, and particularly in 1945, a tough wiry weed established itself on the surface and by its mere physical presence probably slowed up evaporation by decreasing wind speed over the surface. As a result of this a little more heat would be available for warming the surface, i.e.  $T_s$ , and hence  $e_s$  and  $(e_s - e_a)$ , would increase, so leading to an increased estimate as a result of a decreased observed evaporation.

(iii) For cylinders O, 5B and 16T the radiation estimates are almost invariably too low. In some of the winter periods the value of  $\beta$  reached very uncertain values near  $-1$  and the derived values of  $H/(1+\beta)$  were absurd. These values are not plotted.

(iv) For tank MO both estimates are reasonably good and table 5 and figure 6 above may be regarded as giving the fine structure of some of the results shown in figure 6.

(v) Comparison of the results for cylinder O and tank MO so far quoted seem superficially, to be in conflict; the same sink strength formula fits both whereas the radiation estimates fit the tank results only. The evaporation from the tank was usually about 25 % less than that from the cylinder (table 6 below), but the surface temperature was correspondingly lower, leading to the near agreement of table 6. It is suggested that the increased evaporation from cylinder O was due to the greater surface temperature, i.e. to an extra supply of energy being available to it that was not available for the tank, and that the exclusion of this additional energy supply from the energy balance for cylinder O led to the noted underestimates of evaporation on this basis. Whereas tank MO had an all-soil surround, O and the other cylinders had a hollow on one side. The air in this would warm up during the day to ten

peratures much in excess of  $T_a$  leading to an inflow of heat, i.e. months.

It is reasonable to assume that i.e. that *relative* values of evaporation would not be materially affected. This has not been upset by the details.

#### 6. CONCLUSIONS

It is convenient to interpret the daily and periodic evaporation rates concerning experimental accuracy.

(a) A sink strength formula of intensive work by Rohwe for surfaces having different environments.

(b) An energy balance has been made of these surfaces in which the balance made in striking the balance.

(c) The discrepancy for the formula applicable to all the cylinder evaporation rates may be deduced.

#### 7. RESULTS (CONTINUED)

Table 6 shows the seasonal evaporation in *in./day*, and the relative evaporation grouped roughly in calendar months are included. The bare soil evaporation in 1945 involving destruction of vegetation.

Natural surfaces that are rarely remain moist in soil cultivation, rarely grow weeds and therefore, permissible to select the evaporation rate from a flat open water surface exposed to the sun of indoor experiments (Penman 1945).

It is not so easy to reach the simplicity, that the leaf temperature surface, the ratio  $E_T/E_0$  will be of the order of 1.0. The difference between the mirror and the leaf surface difference is large compared with the difference.  $E_T/E_0$  will be of the order of about 0.30 in winter at R

an wind velocity for the period, temperatures much in excess of the soil or water in the cylinders at the same depth, leading to an inflow of heat, i.e. to a negative value of  $C$  in (8), at least for midsummer months.

It is reasonable to assume that the effect would be the same order for all cylinders, i.e. that *relative* values of evaporation from the three kinds of saturated surfaces would not be materially affected and that one of the major aims of the experiment has not been upset by the deficiency of the experimental site.

the surface temperatures measured until mid-June 1945, the preceding natural periods.

#### 6. CONCLUSIONS FROM RESULTS OF PRECEDING PARAGRAPHS

It is convenient to interpolate a short set of conclusions based on the study of daily and periodic evaporation. Without repeating the reservations already made concerning experimental accuracy and theoretical adequacy, we have:

(a) A sink strength formula has been obtained that agrees closely with the results of intensive work by Rohwer, and is substantially the same for two open water surfaces having different environments.

(b) An energy balance has led to close agreement with observed values for one of these surfaces in which the conditions most nearly satisfy the basic assumptions made in striking the balance.

(c) The discrepancy for the other surface is of a kind that can reasonably be applicable to all the cylinders similarly exposed, so that relative values of evaporation rates may be deduced.

#### 7. RESULTS (CONTINUED): RELATIVE EVAPORATION RATES

Table 6 shows the seasonal variation in evaporation from cylinder O, expressed in *in./day*, and the relative rates for bare and turfed soil, the natural periods being grouped roughly in calendar months. For 1945 the mean daily rates for tank MO are included. The bare soil cylinder was set up for a new experiment in December 1945 involving destruction of the surface.

Natural surfaces that are bare, such as arable land before a crop is established, will rarely remain moist in summer when weeds can grow, and will, under ordinary cultivation, rarely grow weeds in winter when the soil will remain moist. It is, therefore, permissible to select results from the preceding table and to state that the evaporation rate from a freshly wetted bare soil will be about 90% of that from an open water surface exposed to the same weather. This is in agreement with the results of indoor experiments (Penman 1941) and other outdoor work (e.g. White 1932).

It is not so easy to reach a firm decision about the grass surface. Assuming, for simplicity, that the leaf temperature is always the same as that of the open water surface, the ratio  $E_T/E_0$  will depend upon the length of daylight ( $N$  hr.), and the difference between the minimum surface temperature and the dewpoint. If this difference is large compared with the diurnal temperature change, the value of  $E_T/E_0$  will be of the order of  $N/24$ , i.e. will range from about 0.70 in summer, to about 0.30 in winter at Rothamsted. As the excess of minimum over dewpoint

temperature decreases, both these extreme ratios increase, and when the difference is zero they will be of the order 0.95 and 0.58 respectively, with a value of about 0.83 at the equinoxes (assuming a sinusoidal variation of diurnal temperature change). When the dewpoint temperature is greater than the surface minimum conditions are more complicated, as condensation will take place on both kinds of surface, and until the dew is evaporated both will behave as open water surfaces whatever the light conditions. Under these conditions the relative evaporations over a whole day will approach equality, although the absolute amounts will tend to be small.

TABLE 6. SEASONAL VARIATION IN RELATIVE EVAPORATION

| period<br>1944 | $E_0$<br>(in./day) | $E_B/E_0$ | $E_T/E_0$ | period<br>1945   | $E_0$<br>(in./day) | $E_B/E_0$ | $E_T/E_0$ |
|----------------|--------------------|-----------|-----------|------------------|--------------------|-----------|-----------|
| Feb.           | —                  | —         | —         | 8 Feb.—4 Mar.    | 0.04               | 0.78      | 0.31      |
| Mar.           | —                  | —         | —         | 5 Mar.—7 April   | 0.06               | 1.10      | 0.86      |
| April          | —                  | —         | —         | 8—30 April       | 0.10?              | 1.05?     | 0.92?     |
| 9 May—1 June   | 0.18               | 0.91      | 0.83      | 4—25 May         | 0.11               | 0.89      | 0.69      |
| 2—28 June      | 0.19               | 0.98      | 0.88      | 28 May—9 June    |                    |           |           |
| 29 June—4 Aug. | 0.16               | 0.82      | 0.89      | 10—22 June       | 0.16               | 0.83      | 0.72      |
| 5 Aug.—2 Sept. | 0.19               | 0.81      | 0.78      | 23 June—2 July   |                    |           |           |
| 5—30 Sept.     | 0.10               | 0.91      | 0.79      | 3—12 July        | 0.17               | 0.84      | 0.71      |
| 1—10 Oct.      | 0.05               | 0.65      | 0.48      | 16 July—8 Aug.   |                    |           |           |
| 20 Oct.—6 Nov. | —                  | —         | —         | 12 Aug.—2 Sept.  | 0.11               | 0.87      | 0.96      |
| 7—13 Nov.      | 0.03               | 0.54      | 0.0       | 6—15 Sept.       | 0.09               | 0.61      | 0.61      |
| 20—30 Nov.     | —                  | —         | —         | 16—24 Sept.      |                    |           |           |
| 1—22 Dec.      | 0.01               | 0.8       | -0.4      | 25 Sept.—22 Oct. | 0.07               | 0.70      | 0.64      |
|                |                    |           |           | 1—28 Nov.        | 0.03               | 0.7?      | 0.6       |
|                |                    |           |           | 29 Nov.—22 Dec.  | 0.05               | —         | -0.0      |

The simple initial assumption is not likely to be realized in practice, and both mean surface temperature and its daily amplitude will be important. In winter, when the important temperature differences are likely to be small and unequal there may be more condensation on one surface than another and so negative ratios might be obtained (December 1944 and 1945).

It is clear that a more detailed study of this part of the problem is needed, and at the moment only a limited generalization can be made with the reservation that it may apply to the Rothamsted site and the years 1944–45 only. Using the totals, for midsummer periods (May–August inclusive) the ratio is 0.81; for equinoctial periods (March–April, September–October) it is 0.72; for midwinter the results are too few and too erratic to attempt expression of a ratio. We can, however, get an indication of the order of magnitude from another source. At Fleam Dyke, Cambridge, two drain gauges, one bare and the other turfed, are maintained side by side. Over winter months, when the summer drying has been made good in both gauges,  $E_B$  is greater than  $E_T$ . For the months December–March inclusive, in the years 1939–40 to 1942–43, the totals were:

$$\Sigma E_B = 10.5 \text{ in.}, \quad \Sigma E_T = 7.6 \text{ in.} \quad \text{i.e.} \quad E_T/E_B = 0.725$$

(data kindly supplied by Mr Po and Town Waterworks Co.). If the March transpiration would ratio would be smaller. To a st off to 0.60.

8. CONCLUSIONS F  
IN F

(a) The evaporation rate from an open water surface exposed t

(b) The corresponding relativ supply varies with season of tl England are:

- Midwinter (November)
- Spring and autumn (M)
- Midsummer (May–Au)
- Whole year

(c) The discrepancy between when the effect of extra heat flo important.

9.

(a) Data re

Before the conclusions of § estimate the evaporation that v to the same weather. To avo (i) for the sink strength estim perature, the mean dewpoint t

$$E_0 = 0.35(1$$

(ii) for the energy balance esti radiation (or mean daily durati duration of sunshine), mean mean surface temperature. Th

E

where  $H = R_C(1-r) -$

and  $R_C \div R_A(0.18 + ($

(iii) for the combined estimat dewpoint temperature, mean

Then  $E_0 = (H$

crease, and when the difference  
pectively, with a value of about  
riation of diurnal temperature  
ter than the surface minimum,  
will take place on both kinds of  
behave as open water surfaces  
tions the relative evaporations  
the absolute amounts will tend

ta kindly supplied by Mr Porteous, Engineer-in-charge, Cambridge University  
Town Waterworks Co.). Putting  $E_B/E_T = 0.90$ , then  $E_T/E_0 = 0.65$ , and as  
March transpiration would be greater than that in November, the midwinter  
would be smaller. To a satisfactory degree of accuracy it may be rounded  
to 0.60.

8. CONCLUSIONS FROM RESULTS OF SEASONAL VARIATION  
IN RELATIVE EVAPORATION

(a) The evaporation rate from continuously wet bare soil is 0.9 times that from  
open water surface exposed to the same weather conditions in all seasons.

(b) The corresponding relative evaporation rate from turf with a plentiful water  
supply varies with season of the year. Provisional values of  $E_T/E_0$  for southern  
England are:

|  |      |
|--|------|
| Midwinter (November–February)                      | 0.6  |
| Spring and autumn (March–April, September–October) | 0.7  |
| Midsummer (May–August)                             | 0.8  |
| Whole year   | 0.75 |

(c) The discrepancy between cylinder O and tank MO is greatest in midsummer  
when the effect of extra heat flow through the walls of cylinder O is likely to be most  
important.

9. TESTS ON OTHER DATA

(a) Data required and methods of using them

Before the conclusions of § 8 can be applied to soil surfaces it is necessary to  
estimate the evaporation that would take place from an open water surface exposed  
to the same weather. To avoid reference back, the requirements are repeated:  
(i) for the sink strength estimate it is necessary to know the mean surface tem-  
perature, the mean dewpoint temperature and the mean wind velocity. Then

$$E_0 = 0.35(1 + 9.8 \times 10^{-3}u_2)(e_s - e_d) \text{ mm./day; } \quad (19)$$

(ii) for the energy balance estimate the requirements are: mean daily short-wave  
radiation (or mean daily duration of sunshine), mean daily cloudiness (or mean daily  
duration of sunshine), mean air temperature, mean dewpoint temperature, and  
mean surface temperature. Then

$$E_0 = H/(1 + \beta) \text{ mm./day, } \quad (11)$$

$$\left. \begin{aligned} \text{where } H &= R_C(1 - r) - \sigma T_a^4(0.56 - 0.092\sqrt{e_d})(0.10 + 0.90n/N) \\ \text{and } R_C &\doteq R_A(0.18 + 0.55n/N); \end{aligned} \right\} \quad (13)$$

(iii) for the combined estimate there must be known, mean air temperature, mean  
dewpoint temperature, mean wind velocity, and mean daily duration of sunshine.

Then

$$E_0 = (H\Delta + 0.27E_a)/(\Delta + 0.27) \text{ mm./day, } \quad (16)$$

RELATIVE EVAPORATION

|       | $E_0$<br>(in./day) | $E_B/E_0$ | $E_T/E_0$ | $E_T/E_0$<br>(in./day) |
|-------|--------------------|-----------|-----------|------------------------|
| Jan.  | 0.04               | 0.78      | 0.31      | 0.01                   |
| Feb.  | 0.06               | 1.10      | 0.86      | 0.05                   |
| Mar.  | 0.10?              | 1.05?     | 0.92?     | 0.10                   |
| Apr.  | 0.11               | 0.89      | 0.69      | 0.12                   |
| May   | 0.16               | 0.83      | 0.72      | 0.13                   |
| June  | 0.17               | 0.84      | 0.71      | 0.14                   |
| July  | 0.11               | 0.87      | 0.96      | 0.08                   |
| Aug.  | 0.09               | 0.61      | 0.61      | 0.06                   |
| Sept. | 0.07               | 0.70      | 0.64      | 0.05                   |
| Oct.  | 0.03               | 0.7?      | 0.6       | 0.02                   |
| Nov.  | 0.05               | —         | —         | 0.05                   |
| Dec.  | 0.05               | —         | —         | 0.05                   |

realized in practice, and both  
will be important. In winter,  
to be small and unequal there  
r and so negative ratios might

of the problem is needed, and  
made with the reservation that  
944–45 only. Using the totals,  
ratio is 0.81; for equinoctial  
for midwinter the results are  
ratio. We can, however, get an  
source. At Fleam Dyke, Cam-  
bridge, are maintained side by side.  
made good in both gauges,  
March inclusive, in the years

$$E_T/E_B = 0.725$$

where  $H$  is given by (13) above, and

$$E_a = 0.35(1 + 9.8 \times 10^{-3}u_2)(e_a - e_d) \quad (\text{cf. (19)}).$$

The values of  $N$  and  $R_A$  will vary with latitude and season, but are readily obtainable from standard sources. The value of  $r$  has a similar double variance but it will probably be sufficiently accurate to use a constant value of 0.05.

For general use, where  $E_0$  has not been directly measured, the third method is most useful, and as the dependence on wind speed is not very critical, a Beaufort wind force can be substituted for  $u_2$  so giving an opportunity of making an evaporation estimate from the data of a weather map. To convert the sink strength formula, it is sufficient to use the 'good' expression for cylinder O (table 4) combined with two standard conversion factors:

$$E_0 = 0.033u_2^{0.68}(e_s - e_d), \quad u_2 \text{ in miles/day;}$$

$$u_2 = 0.78u_{10};$$

$$u_{10} = 1.87B^{\frac{1}{2}} \times 24, \quad u_{10} \text{ in miles/day;}$$

i.e.

$$E_0 = 0.033[0.78 \times 24 \times 1.87B^{\frac{1}{2}}]^{0.68}(e_s - e_d);$$

$$= 0.37B^{1.02}(e_s - e_d) \text{ mm./day.}$$

The coarseness of the Beaufort estimates of wind force suggests that this may safely be reduced to

$$E_0 = 0.37B(e_s - e_d) \text{ mm./day,} \quad (20)$$

giving

$$E_a = 0.37B(e_a - e_d) \text{ mm./day}$$

for use in (16).

Although evaporation data exist for many sites over long periods of time there are not many sets that have sufficient contemporary meteorological data alongside to enable a comparison of observed and predicted evaporation to be made. The few cases discussed below have been chosen to give a fairly wide variety of sites and types of surface.

(b) *Open water*

(i) Fitzgerald (1886). Pans were floated in the middle of an 85 acre reservoir at *Chestnut Hill, Boston, Mass.* Table 7 gives results for a pan 10 ft. diameter and 10 ft. deep, filled to within 3 in., and sunk to within 6 in. of the top. The anemometer was at 30.5 ft. above the surface. Values of  $E_0$ ,  $u$ ,  $T_s$ ,  $T_a$  and  $h$  were measured on 8 days between June and October 1885. Using (19) the following results are obtained,  $E_{19}$  representing the estimates.

TABLE 7. DAILY EVAPORATION AT BOSTON, U.S.A.

| day                 | ... | 1    | 2   | 3   | 4   | 5    | 6   | 7   | 8   |
|---------------------|-----|------|-----|-----|-----|------|-----|-----|-----|
| $u_2$ (m.p.d.)      |     | 223  | 135 | 116 | 150 | 127  | 75  | 51  | 129 |
| $(e_s - e_d)$ (mm.) |     | 10.4 | 7.6 | 7.8 | 7.7 | 10.0 | 8.0 | 6.3 | 2.5 |
| $E_{19}$ (mm./day)  |     | 11.6 | 6.2 | 5.8 | 6.7 | 7.8  | 4.9 | 3.3 | 2.0 |
| $E_0$ (mm./day)     |     | 10.7 | 6.8 | 6.1 | 6.6 | 7.1  | 7.1 | 4.1 | 2.5 |

(ii) Visentini (1936). A pan anemometer on the dam. Val information it is assumed that the same as for the Rothamste

TABLE 8. MEAN

|                     | 1934 | ... | Mar. |
|---------------------|------|-----|------|
| $u$ (m.p.d.)        |      |     | 106  |
| $(e_s - e_d)$ (mm.) |      |     | 3.0  |
| $E_{19}$ (mm./day)  |      |     | 2.1  |
| $E_0$ (mm./day)     |      |     | 1.8  |

(iii) Davydov (1936). Mean (no details). Values of  $(e_s - e_d)$  velocity at 9 m. are given. R

TABLE 9. MEAN DAILY

|                     | Apr. | May |
|---------------------|------|-----|
| $u_2$ (m.p.d.)      | 136  | 106 |
| $(e_s - e_d)$ (mm.) | 0.1  | 0.0 |
| $E_{19}$ (mm./day)  | 0.1  | 0.0 |
| $E_0$ (mm./day)     | 0.4  | 0.2 |

(iv) Ray (1931). Monthly pan are given for 1917-30 f saturation deficit and mean day has been assumed for t  $(e_a - e_d)$  in inches of mercury

TABLE 10. MEAN MON

|                      | Jan |
|----------------------|-----|
| $E_a$ (in./month)    | 5.5 |
| $H$ (in./month)      | 3.8 |
| $E_{16}$ (in./month) | 4.5 |
| $E_0$ (in./month)    | 5.1 |
|                      | Ju  |
| $E_a$ (in./month)    | 8.  |
| $H$ (in./month)      | 7.  |
| $E_{16}$ (in./month) | 7.  |
| $E_0$ (in./month)    | 8.  |

(ii) Visentini (1936). A pan was floated in the reservoir at *Molato, Italy*, with an anemometer on the dam. Values of  $T_s$ ,  $T_a$ ,  $u$  and  $h$  are given. In the absence of information it is assumed that the anemometer height was 2 m. and the calibration the same as for the Rothamsted anemometer.

(cf. (19)).  
d season, but are readily obtain-  
nilar double variance but it will  
value of 0.05.

measured, the third method is  
is not very critical, a Beaufort  
ortunity of making an evapora-  
nvert the sink strength formula  
nder O (table 4) combined with

miles/day;

s/day;

$(e_s - e_a)$ ;

ce suggests that this may safely

lay, (20)

lay

ver long periods of time there  
meteorological data alongside  
aporation to be made. The few  
airly wide variety of sites and

ddle of an 85 acre reservoir at  
a pan 10 ft. diameter and 10 ft.  
the top. The anemometer was  
nd  $h$  were measured on 8 days  
ollowing results are obtained,

OSTON, U.S.A.

|      |     |     |     |
|------|-----|-----|-----|
| 5    | 6   | 7   | 8   |
| 27   | 75  | 51  | 129 |
| 10.0 | 8.0 | 6.3 | 2.5 |
| 7.8  | 4.9 | 3.3 | 2.0 |
| 7.1  | 7.1 | 4.1 | 2.5 |

TABLE 8. MEAN DAILY EVAPORATION AT MOLATO, ITALY

|                     | 1934 | ... | Aug. | Sept. | Oct. | Nov. | Dec. |
|---------------------|------|-----|------|-------|------|------|------|
| $u$ (m.p.d.)        |      |     | 67   | 48    | 44   | 82   | 77   |
| $(e_s - e_a)$ (mm.) |      |     | 8.2  | 6.85  | 5.8  | 3.2  | 1.95 |
| $E_{10}$ (mm./day)  |      |     | 4.8  | 3.5   | 2.9  | 2.1  | 1.2  |
| $E_0$ (mm./day)     |      |     | 5.1  | 3.9   | 4.1  | 2.3  | 1.3  |

|                     | 1935 | ... | Mar. | Apr. | May | June | July | Aug. | Sept. |
|---------------------|------|-----|------|------|-----|------|------|------|-------|
| $u$ (m.p.d.)        |      |     | 106  | 96   | 99  | 87   | 91   | 70   | 72    |
| $(e_s - e_a)$ (mm.) |      |     | 3.0  | 5.25 | 3.9 | 8.2  | 8.5  | 6.3  | 5.4   |
| $E_{10}$ (mm./day)  |      |     | 2.1  | 3.6  | 2.7 | 5.4  | 5.7  | 3.9  | 3.3   |
| $E_0$ (mm./day)     |      |     | 1.8  | 2.7  | 3.0 | 6.2  | 7.9  | 5.7  | 4.3   |

(iii) Davydov (1936). Measurements were made on *Sevan Lake, Soviet Armenia* (no details). Values of  $(e_s - e_a)$  between lake surface and 10 cm. above, and of wind velocity at 9 m. are given. Results are means for 1927-30:

TABLE 9. MEAN DAILY EVAPORATION AT SEVAN LAKE, SOVIET ARMENIA

|                     | Apr. | May | June | July | Aug. | Sept. | Oct. | Nov. | Dec. |
|---------------------|------|-----|------|------|------|-------|------|------|------|
| $u_s$ (m.p.d.)      | 136  | 106 | 123  | 157  | 119  | 144   | 140  | 153  | 183  |
| $(e_s - e_a)$ (mm.) | 0.1  | 0.0 | 1.5  | 2.3  | 3.9  | 4.7   | 4.9  | 3.8  | 3.3  |
| $E_{10}$ (mm./day)  | 0.1  | 0.0 | 1.2  | 2.0  | 3.0  | 4.0   | 4.1  | 3.3  | 3.2  |
| $E_0$ (mm./day)     | 0.4  | 0.2 | 1.2  | 2.1  | 3.4  | 4.5   | 4.1  | 3.6  | 2.9  |

(iv) Ray (1931). Monthly means for a standard U.S. Weather Bureau evaporation pan are given for 1917-30 for *San Juan, Puerto Rico*, together with  $u_0$ ,  $T_a$ , mean saturation deficit and mean hours of sunshine. For speed of computation a 12 hr. day has been assumed for the whole year. As results are given in in./month and  $(e_a - e_d)$  in inches of mercury, the same form is kept in table 10:

TABLE 10. MEAN MONTHLY EVAPORATION AT SAN JUAN, PUERTO RICO

|                      | Jan. | Feb. | Mar. | Apr. | May  | June |
|----------------------|------|------|------|------|------|------|
| $E_a$ (in./month)    | 5.35 | 4.75 | 7.3  | 7.2  | 7.6  | 7.4  |
| $H$ (in./month)      | 3.8  | 5.15 | 6.1  | 7.0  | 7.05 | 7.7  |
| $E_{10}$ (in./month) | 4.25 | 5.05 | 6.4  | 7.05 | 7.2  | 7.65 |
| $E_0$ (in./month)    | 5.55 | 5.55 | 7.6  | 7.85 | 7.75 | 7.45 |

|                      | July | Aug. | Sept. | Oct. | Nov. | Dec. |
|----------------------|------|------|-------|------|------|------|
| $E_a$ (in./month)    | 8.55 | 8.15 | 6.05  | 5.0  | 4.8  | 5.75 |
| $H$ (in./month)      | 7.1  | 7.55 | 6.4   | 5.3  | 4.3  | 3.8  |
| $E_{10}$ (in./month) | 7.55 | 7.7  | 7.3   | 5.2  | 4.45 | 4.3  |
| $E_0$ (in./month)    | 8.15 | 8.05 | 6.6   | 5.85 | 5.1  | 5.45 |

(c) *Bare soil*

There are few records available and information about related weather is even more rare. By the courtesy of the Indian authorities, the rainfall, drainage and other weather records for Pusa have been made available from 1907 to 1934. Pusa lies in the monsoon region of Asia, at latitude 26° N. in the Ganges basin, and in most years it is a fairly reasonable assumption that once the monsoon has broken, bare soil will remain moist for most of the monsoon period.

In 1906 four drain gauges were constructed, each 1/1000 acre in area, without disturbing the soil, two being 3 ft. deep and two 6 ft. deep. One at each depth was kept bare and the other pair cropped, and daily records of rainfall and drainage for months in which at least one gauge ran are available from 1907-34. The crop carried by gauges II (6 ft.) and IV (3 ft.) during the monsoon period was either maize (1907-15) or sunn hemp (1916-34), sowing taking place in June each year. Both are tall plants (8 ft. and 6 ft. high), and, standing well above the turf surround, they would be better ventilated, intercept more radiation and expose a larger transpiring surface to the air than a patch of the same size in the middle of a large field. Transpiration would be abnormally great, and the evidence of the cropped gauges is to be rejected on the ground that the same surface was not typical of its environment.

The records were separated into natural periods in which the difference between rainfall and drainage (or drainage and run-off) can be equated to the evaporation of the period. As drainage continued for several days after rain it was not always possible to decide which was the last rainfall causing drainage, and there are inevitable uncertainties in the estimation of  $(R - D)$  per day as a result. As elsewhere, all estimates of evaporation are very much dependent upon the drain gauge receiving the same amount of rain as the rain gauge.

The values of  $R - D$  for gauges I and II (6 ft. and 3 ft. bare) usually agreed closely and there was general consistency in the performance of gauges II and IV. A condensed summary for 2 years shows the order of evaporation per day from all four; further analysis will be restricted to the records for gauge I.

TABLE 11. COMPARATIVE EVAPORATION AT PUSA

| period           | R/day<br>(in.) | $(R - D)/\text{day}$ (in.) |          |           |          |
|------------------|----------------|----------------------------|----------|-----------|----------|
|                  |                | I (6'B)                    | II (6'C) | III (3'B) | IV (3'C) |
| 1911             |                |                            |          |           |          |
| 8-18 July        | 0.34           | 0.17                       | 0.24     | 0.15      | 0.23     |
| 19 July-25 Aug.  | 0.47           | 0.16                       | 0.37     | 0.15      | 0.35     |
| 26 Aug.-26 Sept. | 0.27           | 0.12                       | 0.24     | 0.12      | > 0.27   |
| 27 Sept.-13 Oct. | 0.22           | 0.12                       | 0.11     | 0.10      | no D     |
| 1922             |                |                            |          |           |          |
| 2-26 July        | 0.72           | 0.11                       | 0.22     | 0.08      | 0.13     |
| 27 July-9 Aug.   | 0.53           | 0.09                       | 0.21     | 0.05      | ?        |
| 10-20 Aug.       | 0.24           | 0.12                       | 0.20     | 0.10      | ?        |
| 21 Aug.-23 Sept. | 0.21           | 0.09                       | 0.22     | 0.06      | 0.19     |
| 29 Sept.-5 Oct.  | 0.19           | 0.13                       | 0.19     | 0.14      | > 0.19   |

Weather observations at Pusa and wet bulb temperatures, air readings at 08.00 and 08.03 hr. the last being the actual reading expected to be equal when readings are erratic, ranging up to 3° F, the

Assuming that the anemometer was running at 08.00 hr. the next, the run-off was when the reading passed through zero and the calibration the same as for the mean air temperature and the mean saturation deficit was obtained.

The determination of  $H$  by the method of comment is unnecessary. This was done in all years and only two, 1911 and 1922, wind speeds (as measured) were used for air temperatures from 81 to 88° F.  $n/N$  from 0.00 to 0.64.

Using the annual summary of evaporation in the British Isles have been obtained for mean air temperature, wind force and the mean ratios of  $E_a$  and  $H$  were obtained for the British Isles. Converted to inches per year

TABLE 12. ESTIMATED EVAPORATION

| period          | R/day<br>(in.) |
|-----------------|----------------|
| 1911            |                |
| 8-18 July       | 0.34           |
| 19 July-29 Aug. | 0.46           |
| 30 Aug.-8 Sept. | 0.17           |
| 9-26 Sept.      | 0.32           |
| 27-30 Sept.     | 0.18           |
| 1-13 Oct.       | 0.22           |
| 1922            |                |
| 2-20 July       | 0.80           |
| 21-26 July      | 0.45           |
| 27 July-9 Aug.  | 0.54           |
| 10-15 Aug.      | 0.12           |
| 16-20 Aug.      | 0.38           |
| 21-26 Aug.      | 0.16           |
| 27-30 Aug.      | 0.25           |
| 31 Aug.-5 Sept. | 0.25           |
| 6-10 Sept.      | 0.15           |
| 11-28 Sept.     | 0.34           |
| 29 Sept.-5 Oct. | 0.19           |



about related weather is even  
ies, the rainfall, drainage and  
able from 1907 to 1934. Pusa  
in the Ganges basin, and in  
once the monsoon has broken,  
period.

1/1000 acre in area, without  
deep. One at each depth was  
ds of rainfall and drainage for  
from 1907-34. The crop carried  
monsoon period was either maize  
place in June each year. Both  
above the turf surround, they  
and expose a larger transpiring  
middle of a large field. Trans-  
ce of the cropped gauges is to  
not typical of its environment.  
which the difference between  
be equated to the evaporation  
rs after rain it was not always  
ing drainage, and there are in-  
day as a result. As elsewhere,  
upon the drain gauge receiving

ft. bare) usually agreed closely  
e of gauges II and IV. A con-  
oration per day from all four;  
auge I.

TON AT PUSA

R-D/day (in.)

| 6°C) | III (3'B) | IV (3'C) |
|------|-----------|----------|
| 24   | 0.15      | 0.23     |
| 37   | 0.15      | 0.35     |
| 24   | 0.12      | > 0.27   |
| 11   | 0.10      | no D     |
| 22   | 0.08      | 0.13     |
| 21   | 0.05      | ?        |
| 20   | 0.10      | ?        |
| 22   | 0.06      | 0.19     |
| 19   | 0.14      | > 0.19   |

Weather observations at Pusa (1911-33) were made at 08.00 hr. and included dry  
and wet bulb temperatures, air maximum and minimum temperatures, anemometer  
readings at 08.00 and 08.03 hr., cloud amount, and 'instrumental test observations',  
the last being the actual readings of the three dry thermometers, presumably ex-  
pected to be equal when read. These readings never agreed and differences were  
erratic, ranging up to 3° F, the usual order being dry > max. > min.

Assuming that the anemometer ran continuously between 08.03 hr. one day and  
08.00 hr. the next, the run-of-the-wind per day was obtained for all days except  
when the reading passed through an unknown zero; the height is assumed to be 2 m.  
and the calibration the same as the Rothamsted instrument (table 2 above). From  
the mean air temperature and the 08.00 hr. value of dewpoint the value of the mean  
saturation deficit was obtained. From these, values of  $E_a$  were obtained.

The determination of  $H$  had to be based on a single cloud estimate per day;  
comment is unnecessary. There seemed little point in evaluating it for all periods  
in all years and only two, 1911 and 1922, are considered in detail (table 12). Mean  
wind speeds (as measured) ranged from 33 to 133 miles/day, mean and 08.00 hr.  
air temperatures from 81 to 86° F, 08.00 hr. humidity from 87 to 92 % and estimated  
 $n/N$  from 0.00 to 0.64.

(d) Cropped soil

Using the annual summary of the Monthly Weather Report, data for 70 stations  
in the British Isles have been abstracted for the years 1930-39 and long period means  
obtained for mean air temperature, mean vapour pressure, mean Beaufort wind  
force and the mean ratios of actual/possible hours of sunshine. From these, values  
of  $E_a$  and  $H$  were obtained for each site and values of  $E_0$  derived, using equation (16).  
Converted to inches per year, an evaporation map of the British Isles was obtained

TABLE 12. ESTIMATED  $E_B$  AND MEASURED  $(R-D)$ /DAY FOR  
BARE SOIL: PUSA 1911 AND 1922

| period          | R/day<br>(in.) | $E_a$ /day<br>(in.) | H/day<br>(in.) | $E_{16}$<br>(in./day) | $0.9E_{16}$<br>(in.) | $(R-D)$ /day<br>(in.) |
|-----------------|----------------|---------------------|----------------|-----------------------|----------------------|-----------------------|
| 1911            |                |                     |                |                       |                      |                       |
| 8-18 July       | 0.34           | 0.08                | 0.11           | 0.10                  | 0.09                 | 0.17                  |
| 19 July-29 Aug. | 0.46           | 0.11                | 0.16           | 0.15                  | 0.13                 | 0.16                  |
| 30 Aug.-8 Sept. | 0.17           | 0.17                | 0.13           | 0.14                  | 0.13                 | 0.11                  |
| 9-26 Sept.      | 0.32           | 0.08                | 0.16           | 0.14                  | 0.12                 | 0.14                  |
| 27-30 Sept.     | 0.18           | 0.07                | 0.11           | 0.10                  | 0.09                 | 0.14                  |
| 1-13 Oct.       | 0.22           | 0.09                | 0.14           | 0.13                  | 0.11                 | 0.10                  |
| 1922            |                |                     |                |                       |                      |                       |
| 2-20 July       | 0.80           | 0.09                | 0.12           | 0.11                  | 0.10                 | 0.10                  |
| 21-26 July      | 0.45           | 0.12                | 0.12           | 0.12                  | 0.11                 | 0.15                  |
| 27 July-9 Aug.  | 0.54           | 0.12                | 0.14           | 0.13                  | 0.12                 | 0.09                  |
| 10-15 Aug.      | 0.12           | 0.04                | 0.08           | 0.07                  | 0.06                 | 0.08                  |
| 16-20 Aug.      | 0.38           | 0.12                | 0.17           | 0.16                  | 0.14                 | 0.18                  |
| 21-26 Aug.      | 0.16           | 0.07                | 0.12           | 0.11                  | 0.10                 | 0.10                  |
| 27-30 Aug.      | 0.25           | 0.09                | 0.10           | 0.10                  | 0.09                 | 0.16                  |
| 31 Aug.-5 Sept. | 0.25           | 0.08                | 0.12           | 0.11                  | 0.10                 | 0.13                  |
| 6-10 Sept.      | 0.15           | 0.09                | 0.22           | 0.18                  | 0.17                 | 0.13                  |
| 11-28 Sept.     | 0.34           | 0.09                | 0.14           | 0.13                  | 0.11                 | 0.14                  |
| 29 Sept.-5 Oct. | 0.19           | 0.02                | 0.19           | 0.14                  | 0.13                 | 0.14                  |

showing the probable value of annual evaporation from open water in exposed sites. From the conclusions in § 8 above one would expect the corresponding value of the annual evaporation from cropped land to be  $\frac{2}{3}$  of  $E_0$  if the crops transpired at maximum rates all the year; in practice the rates will be less than this because of the ripening process in annual vegetation and/or the lack of summer rainfall, particularly in south-east England, but in the table below this conversion factor is applied uniformly. The table shows the observed difference between rainfall and runoff for certain catchment areas (Lloyd 1940, 1941, 1942) (these are rather monotonous), the observed difference multiplied by  $\frac{4}{3}$ , which should be the expected corresponding open water evaporation, and the estimated value of  $E_0$  based on annual mean values of weather elements for stations somewhere near, if not in, the catchment area.

TABLE 13. EVAPORATION FROM CATCHMENT AREAS

| catchment | period  | mean                          |            | estimated $E_0$ for<br>nearby sites<br>(in./year)   |
|-----------|---------|-------------------------------|------------|---|
|           |         | rainfall-runoff<br>(in./year) | $4/3(R-r)$ |   |
| Lea       | 1928-36 | 19.2                          | 26         | Greenwich, 25<br>Rothamsted, 20                     |
| Thames    | 1928-36 | 18.7                          | 25         | Kew, 26<br>Oxford, 24                               |
| Severn    | 1928-36 | 18.8                          | 25         | Ross-on-Wye, 24<br>Cheltenham, 21<br>Shrewsbury, 21 |
| Vrnwy     | 1932-38 | 19.1                          | 26         | Shrewsbury, 21<br>Sealand, 24<br>Llandudno, 23      |
| Rivington | 1932-38 | 17.4                          | 23         | Stonyhurst, 21<br>Hutton, 18                        |
| Spey      | 1936    | 10.3                          | 14         | Dalwhinnie, 17                                      |

Detailed examination of Rothamsted data has shown that the sum of the twelve monthly estimates exceeds the annual estimate by about 10%, due to the extra weight which should be given to summer evaporation. A similar increase is to be expected for other sites and should be borne in mind in reading table 13.

#### 10. GENERAL CONCLUSION

A detailed discussion of the data presented in § 9 (b), (c) and (d) would be intolerably long, and much of it would be concerned with the adequacy of the observations rather than the adequacy of the equations on which the estimates are based. The general impression is satisfactory for all three types of surface, and the wide range of climatic regions employed indicates that something of universal significance has been obtained in the results of §§ 3 to 8, although there must inevitably be something of the time and place at which the experimental work was done included in the equations.

Two aspects of evaporation have been under review. There is that of the physicist and mathematician seeking facts to fit a formula; sufficient has emerged to show

possible sources of weakness in the energy balance and to show the measured to obtain adequate a of the 'practical' man—water e the facts. Formulae have been can be made, or values forecast or predicted. There are still en balance estimates and until the about the possibility of successf

The work described in the p out at Rothamsted Experiment the request of the Meteorologica appreciation of the assistance gi equipment, information and ad discussions to Mr C. S. Durst Dr R. K. Schofield. To the Dir logical Research Committee I an on which this paper is based an Finally, this work could not h of the enclosure had not been : Head of the Physics Departme ment is due for the foresight th it would be many years before.

- Bowen, I. S. 1926 *Phys. Rev.* 27,  
 Brunt, D. 1939 *Physical and dyn.*  
 Cummings, N. W. & Richardson, I  
 Davydov, V. K. 1936 *Assoc. Inte*  
 Fitzgerald, D. 1886 *Trans. Amer*  
 Geiger, R. 1927 *Das Klima der b*  
 Kimball, H. H. 1914 *Mon. Weath*  
 Lloyd, D. 1940 *Quart. J.R. Met.*  
 Lloyd, D. 1941 *Quart. J.R. Met.*  
 Lloyd, D. 1942 *Quart. J.R. Met.*  
 Pasquill, F. 1943 *Proc. Roy. Soc.*  
 Penman, H. L. 1940 *Quart. J.R.*  
 Penman, H. L. 1941 *J. Agric. Sc*  
 Penman, H. L. & Schofield, R. K.  
 Prescott, J. A. 1940 *Trans. Roy.*  
 Ray, C. L. 1931 *Mon. Weath. R*  
 Rohwer, C. 1931 *U.S. Dept. Agr*  
 Sutton, O. G. 1934 *Proc. Roy. S*  
 Sutton, W. G. L. 1943 *Proc. Ro*  
 Sverdrup, H. V. 1945 *Oceanogra*  
 Visentini, M. 1936 See Davydov  
 White, W. N. 1932 *U.S. Dept. I*

on open water in exposed sites. The corresponding value of the energy balance and to show the relative importance of the quantities that must be measured to obtain adequate accuracy in experimental trials. There is also that the 'practical' man—water engineer or meteorologist—seeking a formula to fit the facts. Formulae have been given and where all the necessary measurements can be made, or values forecast, then reliable evaporation rates can be estimated or predicted. There are still empirical aspects of both sink strength and energy balance estimates and until these are removed there must always be some doubt about the possibility of successful translation in space or time of the formulae.

## CATCHMENT AREAS

|                 | estimated $E_0$ for nearby sites (in./year) |
|-----------------|---|
| Greenwich, 25   |   |
| Rothamsted, 20  |   |
| Kew, 26         |   |
| Oxford, 24      |   |
| Ross-on-Wye, 24 |   |
| Cheltenham, 21  |   |
| Shrewsbury, 21  |   |
| Shrewsbury, 21  |   |
| Sealand, 24     |   |
| Llandudno, 23   |   |
| Stonyhurst, 21  |   |
| Hutton, 18      |   |
| Dalwhinnie, 17  |   |

It is seen that the sum of the twelve areas is about 10%, due to the extra area. A similar increase is to be seen in reading table 13.

N

(b), (c) and (d) would be included in the adequacy of the observations which the estimates are based on. Types of surface, and the wide variety of something of universal significance, though there must inevitably be some experimental work was done.

There is that of the physicist who has emerged to show

possible sources of weakness in the theoretical treatment of both sink strength and energy balance and to show the relative importance of the quantities that must be measured to obtain adequate accuracy in experimental trials. There is also that the 'practical' man—water engineer or meteorologist—seeking a formula to fit the facts. Formulae have been given and where all the necessary measurements can be made, or values forecast, then reliable evaporation rates can be estimated or predicted. There are still empirical aspects of both sink strength and energy balance estimates and until these are removed there must always be some doubt about the possibility of successful translation in space or time of the formulae.

The work described in the preceding pages is an extension of research carried out at Rothamsted Experimental Station before 1941. It was resumed in 1944 at the request of the Meteorological Office, and it is a pleasure to be able to record my appreciation of the assistance given by several branches of the Office in the form of equipment, information and advice. I am particularly indebted for many helpful discussions to Mr C. S. Durst of the Meteorological Office, and to my colleague, Dr R. K. Schofield. To the Director of the Meteorological Office and the Meteorological Research Committee I am grateful for the helpful reception given to the report on which this paper is based and for permission to publish it.

Finally, this work could not have been done at short notice if the basic equipment of the enclosure had not been available: to Dr B. A. Keen, F.R.S., until recently Head of the Physics Department at Rothamsted, especially grateful acknowledgement is due for the foresight that provided the installation with full knowledge that it would be many years before the soil would be fit for experimental work.

## REFERENCES

- Bowen, I. S. 1926 *Phys. Rev.* 27, 779.  
 Brunt, D. 1939 *Physical and dynamical meteorology*. Camb. Univ. Press.  
 Cummings, N. W. & Richardson, B. 1927 *Phys. Rev.* 30, 527.  
 Davydov, V. K. 1936 *Assoc. Intern. D'Hydrologie Sci. Bull.* no. 22, 142.  
 Fitzgerald, D. 1886 *Trans. Amer. Soc. Civ. Engrs*, 15, 581.  
 Geiger, R. 1927 *Das Klima der bodennahen Luftschicht*. Brunswick: F. Vieweg.  
 Kimball, H. H. 1914 *Mon. Weath. Rev.*, Wash. 42, 474.  
 Lloyd, D. 1940 *Quart. J.R. Met. Soc.* 66, 181.  
 Lloyd, D. 1941 *Quart. J.R. Met. Soc.* 67, 33.  
 Lloyd, D. 1942 *Quart. J.R. Met. Soc.* 68, 35.  
 Pasquill, F. 1943 *Proc. Roy. Soc. A*, 182, 75.  
 Penman, H. L. 1940 *Quart. J.R. Met. Soc.* 66, 401.  
 Penman, H. L. 1941 *J. Agric. Sci.* 31, 454.  
 Penman, H. L. & Schofield, R. K. 1941 *J. Agric. Sci.* 31, 74.  
 Prescott, J. A. 1940 *Trans. Roy. Soc. S. Aust.* 64, 114.  
 Ray, C. L. 1931 *Mon. Weath. Rev.*, Wash. 59, 192.  
 Rohwer, C. 1931 *U.S. Dept. Agric. Tech. Bull.* 271.  
 Sutton, O. G. 1934 *Proc. Roy. Soc. A*, 146, 701.  
 Sutton, W. G. L. 1943 *Proc. Roy. Soc. A*, 182, 48.  
 Sverdrup, H. V. 1945 *Oceanography for meteorologists*. London: George Allen and Unwin.  
 Visentini, M. 1936 See Davydov. *Bull.* no. 22, p. 119.  
 White, W. N. 1932 U.S. Dept. Interior. Water Supply Paper 659.